
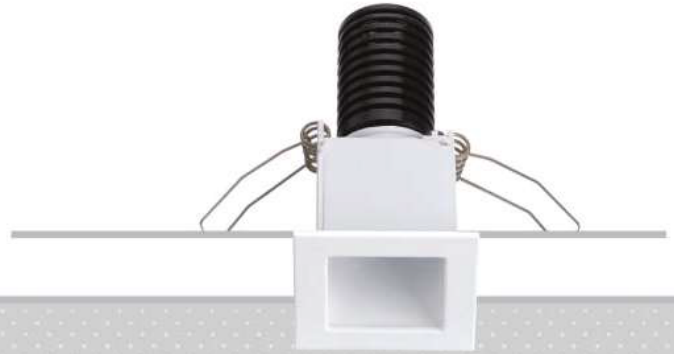



# BABA Q6


design: Roberto Mantovani

**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación  
**500mA (V<sub>f</sub> 8.7V)**

**Power**  
 Pouissance  
 Potencia  
**4.5W**

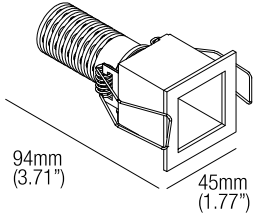

## Photometric diagrams

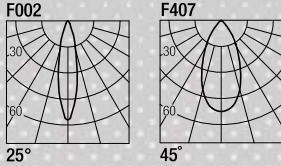

CCT	Flux	CRI
2700K	421 lm	98+
3000K	446 lm	98+

## Code Construction


Construction du code produit  
 Construcción del código de producto

**BW2 | X | X | XX | E |**

<b>BW2</b>	<b>X</b>	<b>Finishing</b> Finitions Acabados	<b>X</b>	<b>Beam angle</b> Angle de faisceau Ángulo del haz	<b>XX</b>	<b>Color Temp.</b> Température couleur Temperatura de color	<b>E</b>
	<b>1</b>	White Blanc Blanco	<b>1</b>	25°	<b>27</b>	2700K	
	<b>2</b>	Grey Gris	<b>2</b>	45°	<b>30</b>	3000K	
	<b>5</b>	Black Noir Negro					

**Drivers (Remote Located)**  
 Alimentateurs  
 Alimentadores

**Series wiring**  
 Câblage en série  
 Cableado en serie




0-10V

**FLEXA-60-PRO-CC-10V**  
 Programmable 60W CC 0-10V Dimming  
 Dimming Range: 0.1%  
 Min. 1/Max. 6 Fixtures per Driver

## IC Housings

**IC064Q01040**  
 Recessed Box for  
 Insulated Ceiling with  
 40mm Hole

**AT064Q01040**  
 Air Tight Recessed Box  
 for Insulated Ceiling with  
 40mm Hole



## Optionals - Accessoires - Accesorios

### L001

**Low luminance louvre**  
 Filtre basse luminance  
 Filtro de baja luminancia



**Note:** the filter must be ordered together with the lighting fixture  
**Note:** le filtre doit être commandé en même temps que l'appareil  
**Nota:** el filtro debe pedirse junto con la luminaria