

**ALPHA 10**  
IP-rated downlight

design Roberto Mantovani



IP67 recessed fixtures of the highest quality construction with extremely compact dimensions with extremely clean 10° light beams for clear and defined light effects. Body in anodized aluminium, versions with the front mask in stainless steel or anodised aluminium and powder-coated. Toughened extra-clear glass, ATEX cable gland, neoprene cord.

Encastrables IP67 de très haute qualité constructive avec des dimensions extrêmement contenues avec faisceaux lumineux de 10° d'une propreté extrême, pour des effets lumineux nets et définis. Corps en aluminium anodisé à épaisseur, versions avec frontal en acier INOX ou en aluminium anodisé et peint en poudre. Verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène.

Luminarias empotrables IP67 de muy alta calidad de fabricación con tamaños extremadamente reducidos y haces luminosos de 10° extremadamente sutiles, para efectos luminosos nítidos y definidos. Cuerpo de aluminio anodizado con espesor, versiones con frente de acero inoxidable o de aluminio anodizado y barnizado con polvo. Vidrio templado extra claro, prensaestopas ATEX, cable de neoprene.



IP67

Class 2



made in Canada

**Supply current**

Courant d'alimentation  
Corriente de alimentación

500mA (V<sub>I</sub> 18V)

**Power**

Pouissance  
Potencia

9W

**Series wiring**

Câblage en série  
Cableado en serie

**LED selection**

Sélection des LED  
Selección del LED

2-Step MacAdam

**CRI**


98

**Lumens**

2400K — 728 lm  
2700K — 1064 lm  
3000K — 1116 lm  
3500K — 1130 lm  
4000K — 1114 lm


**Dimensions**

Dimensions

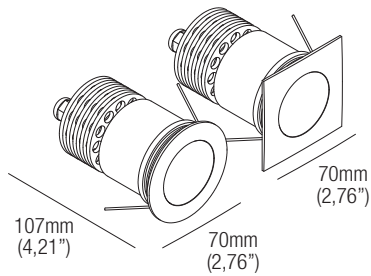

**Photometric diagrams**

Diagrammes photométriques  
Diagramas fotométricos



**Code construction**

Construction du code produit  
Construcción del código de producto

**AP2 X X X 9 1**

Beam angle 10°

24 27 30 35 40 DW  
2400K 2700K 3000K 3500K 4000K Dim to Warm

B N Z C  
1 2  
Round Square  
White Black INOX Custom  
AISI 316L

**Accessories**


Accessoires  
Accessorios

**AT086R02060**

Airtight recessed housing for insulated ceiling

**IC086R02060**

Recessed housing for insulated ceiling




**MP-R060**

Baseplate




**RO2060**

T-bar baseplate



**CSXJ01**

Recessing box



**500mA drivers**

Alimentateurs 500mA  
Alimentadores 500mA

**CCPRO10A-500** (1) IP20

Dimming: PHASE - 0-10V

**CCPRO40A-500** (1..3) IP20

Dimming: PHASE - 0-10V