



JOS R2

design: Roberto Mantovani




Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 2.9V)

Power
 Pouissance
 Potencia
1.5W

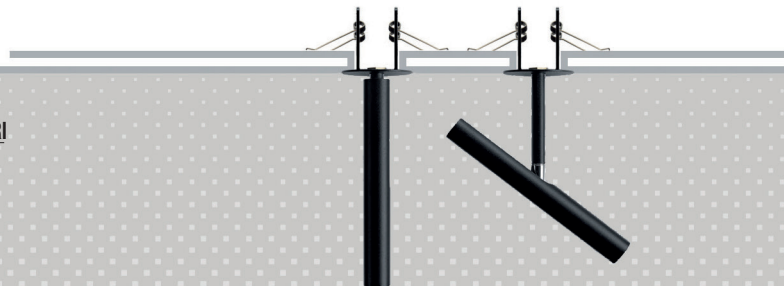

Photometric diagrams



CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4000K	154 lm	93

Code Construction


Construction du code produit
 Construcción del código de producto

JSR2 | X | XX | X |

JSR2	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K	1	20°
		5 Black Noir Negro		30 3000K	2	40°
		C Custom Personnalisée Personalizado		35 3500K		
				40 4000K		
				CU Custom Personnalisée Personalizado		


Drivers (Remote)

Alimentateurs
 Alimentadores

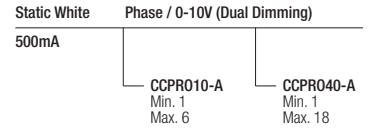

Series wiring

Câblage en série
 Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

L001

Low luminance louvre


Filtere basse luminance
 Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-R040


Mounting Plate
 with 40mm Hole



T-Bar Installation

RO1040

Mounting Plate
 with 40mm Hole

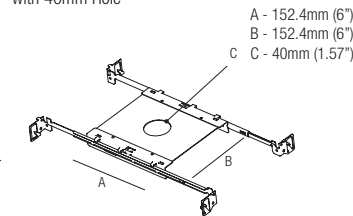


IC Housings

IC064R01040

Recessed Box for
 Insulated Ceiling
 with 40mm Hole

AT064R01040

Air Tight Recessed
 Box for Insulated
 Ceiling with
 40mm Hole



Note: versions with extended arm length are available upon request

Nota: versioni con lunghezza del braccetto maggiorata disponibili su richiesta

Note: versions avec longueur du bras majorée disponibles sur demande