


# OLU 2

design: Roberto Mantovani

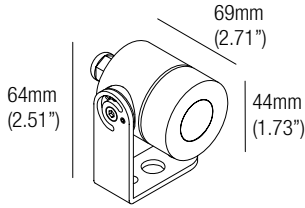


**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación  
**500mA (V<sub>i</sub> 2.9V)**

**Power**  
 Pouissance  
 Potencia  
**1.5W**



## Photometric diagrams

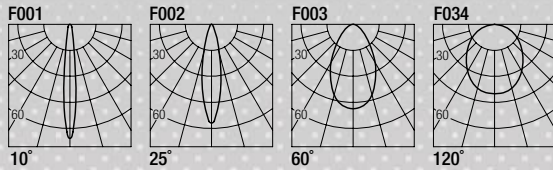

| CCT    | Flux   | CRI |
|--------|--------|-----|
| 2700K  | 128 lm | 90+ |
| 3000K  | 133 lm | 90+ |
| 3500K  | 142 lm | 90+ |
| 4000K  | 154 lm | 85  |
| Custom | TBD    |     |

## Code Construction

Construction du code produit  
 Construcción del código de producto

**LU1 | X | XX | X |**


| LU1 | X | Finishing<br>Finitions<br>Acabados         | XX | Color Temp.<br>Température couleur<br>Temperatura de color | X | Beam angle<br>Angle de faisceau<br>Ángulo del haz |
|-----|---|--|----|--|---|---|
|     |   | <b>2</b> Aluminum<br>Aluminium<br>Aluminio |    | <b>27</b> 2700K  |   | <b>N</b> 10°                                      |
|     |   | <b>5</b> Black<br>Noir<br>Negro            |    | <b>30</b> 3000K  |   | <b>S</b> 25°                                      |
|     |   | <b>6</b> Bronze<br>Bronce                  |    | <b>35</b> 3500K  |   | <b>F</b> 60°                                      |
|     |   |  |    | <b>40</b> 4000K  |   | <b>W</b> 120°                                     |
|     |   |  |    | <b>CU</b> Custom   |   |   |

## Drivers

Alimentateurs  
 Alimentadores

## Series wiring

Câblage en série  
 Cableado en serie



## 0-10V

### FLEXA-60-PRO-CC-10V

Programmable 60W CC 0-10V Dimming  
 Dimming Range: 0.01%  
**Min 1./Max. 18 Fixtures per Driver**

## Phase

### FLEXA-12-500-CC-ELV

12W 500mA Constant Current  
 Dimming Range: 10%  
**Min. 2/Max. 7 Fixtures per Driver**

### FLEXA-23-500-CC-ELV

23W 500mA Constant Current  
 Dimming Range: 10%  
**Min 7./Max. 14 Fixtures per Driver**

## Lutron Forward Phase

### LTEA.1

Hi-Lume Forward Phase  
 20W 500mA Constant Current  
 Dimming Range: 1%  
**Min. 3/Max. 12 Fixtures per Driver**

### LTEA.2

Hi-Lume Forward Phase  
 30W 500mA Constant Current  
 Dimming Range: 1%  
**Min. 12/Max. 18 Fixtures per Driver**

## Lutron Ecosystem

### PEQ.1

Hi-Lume ECO System  
 20W 500mA Constant Current  
 Dimming Range: 1%  
**Min. 3/Max. 12 Fixtures per Driver**

### PEQ.0


Hi-Lume ECO System Premier  
 20W 500mA Constant Current  
 Dimming Range: 0.1%  
**Min. 3/Max. 12 Fixtures per Driver**

## Optionals

Accessori - Accessoires  
 Zubehör - Accesorios

### XP0022

**Earth spike**  
 Piquet de terre  
 Pico de la tierra



### L001

**Low luminance louvre**  
 Filtre basse luminace  
 Filtro de baja luminancia



**Note:** cable cut to measure on request  
**Note:** câble sur mesure disponible sur demande  
**Nota:** cable a medida disponible a petición