


# SASHA 130 DISPLAY

design: Lapo Grassellini


FLEXALIGHTING  
NORTH AMERICA

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**350mA** ( $V_f$  3 x 18V)


**Power**  
Puissance  
Potencia  
**3 x 6.5W**



**Photometric diagrams**

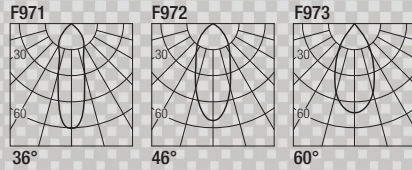

CCT	Flux <sub>(cd)</sub>	CRI
2700K	690 lm	98+
3000K	770 lm	98+
3500K	780 lm	98+
4000K	790 lm	98+

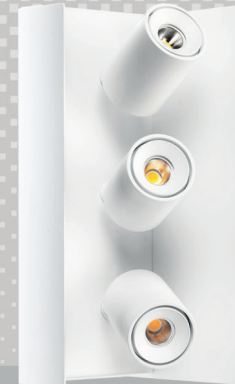

**Code Construction**

Construction du code produit  
Construcción del código de producto

**SD13 X XX 9 X**


<p><b>SD13</b> X</p> <p><b>Finishing</b> Finitions Acabados</p> <p><b>1</b> White Blanc Blanco</p> <p><b>5</b> Black Noir Negro</p> <p><b>C</b> Custom Personnalisée Personalizado</p>	<p><b>XX</b> <b>Color Temp.</b> Température couleur Temperatura de color</p> <p><b>27</b> 2700K</p> <p><b>30</b> 3000K</p> <p><b>35</b> 3500K</p> <p><b>40</b> 4000K</p> <p><b>CU</b> Custom Personnalisée Personalizado</p>	<p><b>9</b> X <b>Beam angle</b> Angle de faisceau Ángulo del haz</p> <p><b>S</b> 36°</p> <p><b>M</b> 46°</p> <p><b>W</b> 60°</p>
--	--	--

**Drivers (Remote)**

Alimentateurs  
Alimentadores

**Series wiring**

Câblage en série  
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

