

BABA Q6

Recessed optic downlight

design Jude Allen



A small and shallow recessed optic downlight characterized by a minimal design featuring a square trim and aperture, and high optical performance. Equipped with CRI98 COB technology, it lends itself to applications ranging from accent to general illumination and it can be fitted with an anti-glare filter for maximum visual comfort.

Ce petit luminaire encastré se caractérise par un design minimal, avec une garniture et une ouverture carrées, et par des performances optiques élevées. Doté de la technologie COB CRI98, il se prête à des applications allant de l'éclairage d'accentuation à l'éclairage général et peut être équipé d'un filtre anti-éblouissement pour un confort visuel maximal.

Un downlight óptico empotrable pequeño y poco profundo caracterizado por un diseño minimalista con un embellecedor y una apertura cuadrados, y un alto rendimiento óptico. Equipado con tecnología COB CRI98, se presta a aplicaciones que van desde la iluminación de acento a la iluminación general y puede equiparse con un filtro antideslumbramiento para un máximo confort visual.



IP20 Class 2



JA8 made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
Static White: 500mA (V_p9V)
Dim To Warm: 250mA (V_i18V)

Power

Pouissance
Potencia
Static White: 4,5W
Dim To Warm: 4,5W

Series wiring

Câblage en série
Cableado en serie

LED selection

Sélection des LED
Selección del LED
2-Step MacAdam

CRI


98

Lumens

2400K — 406 lm
2700K — 517 lm
3000K — 541 lm
3500K — 548 lm
4000K — 541 lm
DW — 358 lm

Dimensions


Dimensiones



Photometric diagrams

Diagrammes photométriques

Diagramas fotométricos




Code construction

Construction du code produit

Construcción del código de producto

BW2 X X X E

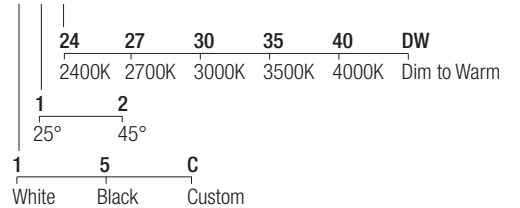

Accessories

Accessoires


Accesorios

AT064R01036

Airtight recessed housing for insulated ceiling

IC064R01036

Recessed housing for insulated ceiling




MP-R036

Baseplate



R01036

T-bar baseplate



LH01

Low luminance hex louvre

Static White 500mA drivers

Static White Alimentateurs 500mA
Static White Alimentadores 500mA

CCPRO10A-500 (1..2) IP20

Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20

Dimming: PHASE - 0-10V

Dim to Warm 250mA drivers

Dim to Warm Alimentateurs 250mA
Dim to Warm Alimentadores 250mA

CCPRO10A-250-DW (1..2) IP20

Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20

Dimming: PHASE - 0-10V