


# BABA R6

Recessed optic downlight

design Roberto Mantovani

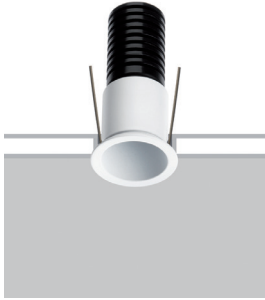

A range of recessed fixtures that combines an extremely refined and minimal design with a high visual comfort: the extremely thin edge and recessed optics make for an innovative and effective element. Equipped with Fidelity LED it places emphasis on CRI98 and R9 93. Available in two extremely clean and performing optics.

Une gamme d'encastrables qui associe un design extrêmement soigné et minimaliste à un confort visuel élevé : le bord extrêmement réduit et l'optique en retrait en font un élément innovant et efficace. Équipé avec LED Fidelity il se caractérise par un CRI98 et R9 93. Disponible dans trois finitions, trois températures couleur et deux optiques extrêmement propres et performantes.

Una gama de empotrables que combina un diseño extremadamente preciso y minimalista con un alto confort visual: el borde extremadamente reducido y la óptica hacia atrás la convierten en un elemento innovador y eficaz. Equipado con LED Fidelity, se caracteriza por un CRI98 y R9 93. Disponible en tres acabados, tres temperaturas de color y dos ópticas extremadamente sutiles y de alto rendimiento.



IP20 Class 2



JA8

made in Canada

### Supply current

Courant d'alimentation  
Corriente de alimentación  
Static White: 500mA (V,9V)  
Dim To Warm: 250mA (V, 18V)

### Power

Pouissance  
Potencia  
Static White: 4,5W  
Dim To Warm: 4,5W

### Series wiring

Câblage en série  
Cableado en serie

### LED selection

Sélection des LED  
Selección del LED  
2-Step MacAdam


CRI  
98

### Lumens

2400K	406 lm
2700K	517 lm
3000K	541 lm
3500K	548 lm
4000K	541 lm
DW	358 lm


### Dimensions

Dimensiones



### Photometric diagrams


Diagrammes photométriques  
Diagramas fotométricos



### Code construction

Construction du code produit  
Construcción del código de producto

### BW1 X X X E

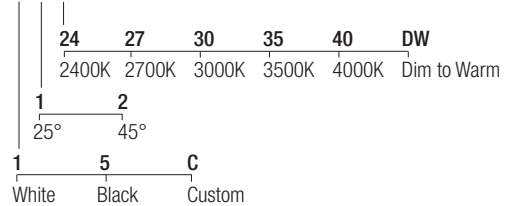

### Accessories


Accessoires  
Accesorios

#### AT064R01030

Airtight recessed housing for insulated ceiling

#### IC064R01030

Recessed housing for insulated ceiling




#### MP-R030

Baseplate



#### R01030

T-bar baseplate



#### LH01

Low luminance hex louvre

### Static White 500mA drivers

Static White Alimentateurs 500mA  
Static White Alimentadores 500mA

#### CCPRO10A-500 (1..2) IP20

Dimming: PHASE - 0-10V

#### CCPRO40A-500 (1..6) IP20

Dimming: PHASE - 0-10V

### Dim to Warm 250mA drivers

Dim to Warm Alimentateurs 250mA  
Dim to Warm Alimentadores 250mA

#### CCPRO10A-250-DW (1..2) IP20

Dimming: PHASE - 0-10V

#### CCPRO40A-250-DW (1..3) IP20

Dimming: PHASE - 0-10V