

# BLACK 6

Recessed optic downlight

design Lapo Grassellini



These dark light recessed downlight combine performance and visual ergonomics. Revolutionary design, they offer the possibility of colour temperatures and beam openings in CRI98.

Appareils encastrables darklight combinant performances et ergonomie visuelle. Révolutionnaires pour le design fonctionnel à dissipation, ils offrent la possibilité de températures de couleur et d'ouvertures du faisceau dans les versions à IRC98 avec R9 93.

Luminarias empotrables dark light que combinan prestaciones y ergonomía visual. Revolucionarios por el diseño funcional para la disipación, ofrecen la posibilidad de temperaturas de color y aperturas de haz en las versiones CRI98 con R9 93.



IP20

Class 2



JA8

made in Canada

### Supply current

Courant d'alimentation  
Corriente de alimentación

Static White: 500mA (V<sub>9V</sub>)

Dim To Warm: 250mA (V<sub>1</sub> 18V)

### Power

Pouissance  
Potencia

Static White: 4,5W

Dim To Warm: 4,5W

### Series wiring

Câblage en série  
Cableado en serie

### LED selection

Sélection des LED  
Selección del LED

2-Step MacAdam

### CRI


98

### Lumens

|       |        |
|-------|--------|
| 2400K | 406 lm |
| 2700K | 517 lm |
| 3000K | 541 lm |
| 3500K | 548 lm |
| 4000K | 541 lm |
| DW    | 358 lm |


### Dimensions

Dimensiones



### Photometric diagrams

Diagrammes photométriques  
Diagramas fotométricos




### Code construction

Construction du code produit

Construcción del código de producto

### BK2 X X X

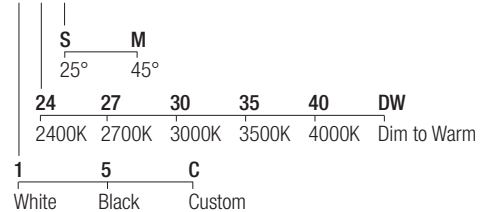


### Accessories

Accessoires

Accesorios

#### AT064R01045

Airtight recessed housing for insulated ceiling



#### IC064R01045

Recessed housing for insulated ceiling


#### MP-R045

Baseplate



#### R01045

T-bar baseplate



### Static White 500mA drivers

Static White Alimentateurs 500mA  
Static White Alimentadores 500mA

CCPRO10A-500 (1..2) IP20

Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20

Dimming: PHASE - 0-10V

### Dim to Warm 250mA drivers

Dim to Warm Alimentateurs 250mA

Dim to Warm Alimentadores 250mA

CCPRO10A-250-DW (1..2) IP20

Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20

Dimming: PHASE - 0-10V