


# SASHA 120 DISPLAY

design: Lapo Grassellini



**Supply current**  
Courant d'alimentation  
Corriente de alimentación

350mA (V<sub>f</sub> 2 x 18V)


**Power**  
Pouissance  
Potencia

2 x 6.5W

**FLEXALIGHTING**  
NORTH AMERICA

IP20 

## Photometric diagrams

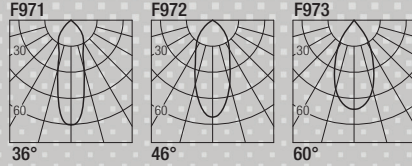

CCT	Flux <sub>(v2)</sub>	CRI
2700K	690 lm	98+
3000K	770 lm	98+
3500K	780 lm	98+
4000K	790 lm	98+



## Code Construction

Construction du code produit  
Construcción del código de producto

SD12, X, XX, 9, X


SD12	X	Finishing	XX	Color Temp.	9	X	Beam angle
		Finitions Acabados	Température couleur Temperatura de color		Angle de faisceau Ángulo del haz		
	<b>1</b>	White Blanc Blanco	<b>27</b>	2700K	<b>S</b>		36°
	<b>5</b>	Black Noir Negro	<b>30</b>	3000K	<b>M</b>		46°
	<b>C</b>	Custom Personnalisée Personalizado	<b>35</b>	3500K	<b>W</b>		60°
			<b>40</b>	4000K			
			<b>CU</b>	Custom Personnalisée Personalizado			

## Drivers (Remote)

Alimentateurs  
Alimentadores

## Series wiring

Câblage en série  
Cableado en serie



For other driver options -  
including Lutron, Dali and DMX -  
please consult factory

Static White

350mA

Phase / 0-10V (Dual Dimming)

CCPR010-A x2  
Min. 1  
Max. 1

CCPR040-A  
Min. 1  
Max. 1

## DCVI.B.1

24VDC Constant Voltage to  
Constant Current Converter  
0-10V / Phase / Dim to Warm  
Compatible, 13W

