


ELIA T10
Trimless projector

design Jude Allen

An adjustable projector designed for recessed trimless installations, featuring a minimalist design and superior optical performance. Ideal for both accent and general lighting applications. With recessed optics, with a CRI of 98 and R9 of 93. Additionally, it can be equipped with an anti-glare filter to enhance visual comfort.

Projecteur réglable conçu pour les installations encastrées sans garniture, doté d'un design minimaliste et de performances optiques supérieures. Idéal pour les applications d'éclairage d'accentuation et d'éclairage général. Optique encastrée, avec un IRC de 98 et un R9 de 93. En outre, il peut être équipé d'un filtre anti-éblouissement pour améliorer le confort visuel.

Projector orientable diseñado para instalaciones empotradas sin marco, con un diseño minimalista y un rendimiento óptico superior. Ideal tanto para aplicaciones de acento como de iluminación general. Con óptica empotrable, con un CRI de 98 y un R9 de 93. Además, puede equiparse con un filtro antideslumbrante para mejorar el confort visual.




IP20 Class 2  made in Canada

Supply current Courant d'alimentation Corriente de alimentación Static White: 500mA (V,18V) Dim To Warm: 400mA (V,18V)	Power Puissance Potencia Static White: 9W Dim To Warm: 7,2W	Series wiring Câblage en série Cableado en serie
LED selection Sélection des LED Selección del LED 2-Step MacAdam	CRI 98	Lumens 2400K — 744 lm 2700K — 1088 lm 3000K — 1142 lm 3500K — 1156 lm 4000K — 1139 lm DW — 645 lm


Dimensions

Dimensiones

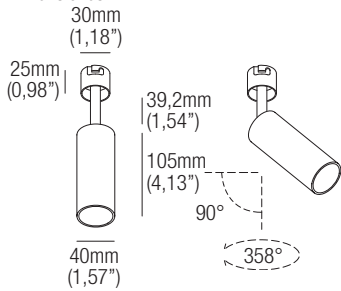


Code construction

Construction du code produit
Construcción del código de producto

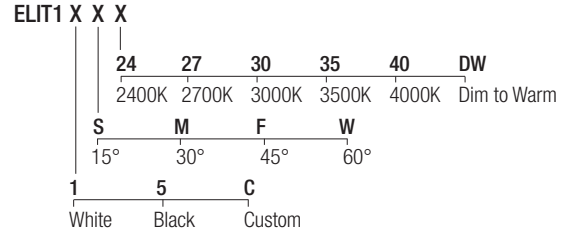

Photometric diagrams

Diagrammes photométriques
Diagramas fotométricos

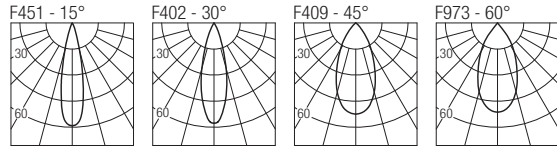


Accessories

Accessoires
Accesorios

AT064R01045

Airtight recessed housing for insulated ceiling



IC064R01045

Recessed housing for insulated ceiling


MP-R045

Baseplate




R01045

T-bar baseplate



ZQC001 White


Plasterboard recessing frame



ZQC001.BMK-WH White

ZQC001.BMK-BLK Black

ZQC001.BMK-CU Custom
Backmount frame for hard surfaces



LH02

Low luminance hex louvre 

Static White 500mA drivers

Static White Alimentateurs 500mA
Static White Alimentadores 500mA

CCPR010A-500 (1) IP20

Dimming: PHASE - 0-10V

CCPR040A-500 (1..3) IP20

Dimming: PHASE - 0-10V

Dim to Warm 400mA drivers

Dim to Warm Alimentateurs 400mA
Dim to Warm Alimentadores 400mA

CCPR010A-400 (1) IP20

Dimming: PHASE - 0-10V

CCPR040A-400 (1..3) IP20

Dimming: PHASE - 0-10V