


**ELIJAH R10**  
Semi-recessed projector

design Jude Allen



An adjustable projector designed for recessed installations, featuring a minimalist design and superior optical performance. Ideal for both accent and general lighting applications. It is equipped with an anti-glare filter for flush mount optics, and a CRI of 98 and R9 of 93.

Un projecteur réglable conçu pour les installations encastrées, doté d'un design minimaliste et de performances optiques supérieures. Il est idéal pour les applications d'éclairage d'accentuation et d'éclairage général. Il est équipé d'un filtre antireflet pour les optiques encastrées, d'un IRC de 98 et d'un R9 de 93.

Proyector orientable diseñado para instalaciones empotradas, con un diseño minimalista y un rendimiento óptico superior. Ideal tanto para aplicaciones de acento como de iluminación general. Está equipado con un filtro antideslumbrante para ópticas empotradas, y un CRI de 98 y un R9 de 93.



IP20

Class 2



made in Canada

**Supply current**

Courant d'alimentation  
Corriente de alimentación  
Static White: 500mA (V,18V)  
Dim To Warm: 400mA (V,18V)

**Power**

Pouissance  
Potencia  
Static White: 9W  
Dim To Warm: 7,2W

**Series wiring**

Câblage en série  
Cableado en serie

**LED selection**

Sélection des LED  
Selección del LED  
2-Step MacAdam

**CRI**


98

**Lumens**

2400K — 744 lm  
2700K — 1088 lm  
3000K — 1142 lm  
3500K — 1156 lm  
4000K — 1139 lm  
DW — 645 lm

**Dimensions**


Dimensiones

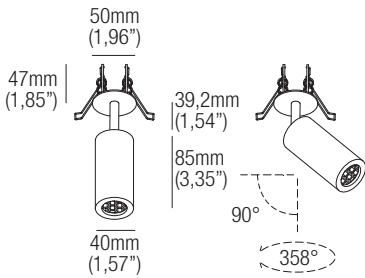

**Code construction**


Construction du code produit  
Construcción del código de producto

**ELJR1 X X X**

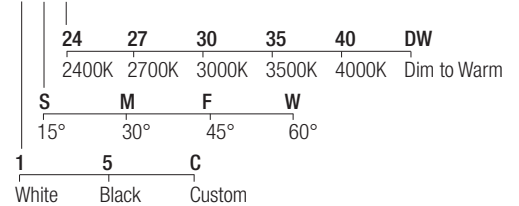

**Photometric diagrams**

Diagrammes photométriques  
Diagramas fotométricos

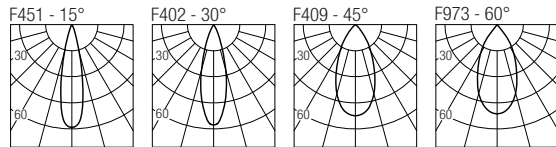

**Accessories**


Accessoires  
Accesorios

**AT064R01040**

Airtight recessed housing for insulated ceiling


**IC064R01040**

Recessed housing for insulated ceiling




**MP-R040**

Baseplate



**R01040**

T-bar baseplate



**Static White 500mA drivers**

Static White Alimentateurs 500mA  
Static White Alimentadores 500mA

**CCPRO10A-500 (1) IP20**

Dimming: PHASE - 0-10V

**CCPRO40A-500 (1..3) IP20**

Dimming: PHASE - 0-10V

**Dim to Warm 400mA drivers**

Dim to Warm Alimentateurs 400mA  
Dim to Warm Alimentadores 400mA

**CCPRO10A-400 (1) IP20**

Dimming: PHASE - 0-10V

**CCPRO40A-400 (1..3) IP20**

Dimming: PHASE - 0-10V