

ELIJAH R6


Semi-recessed projector

design Jude Allen

An adjustable projector designed for recessed installations, featuring a minimalist design and superior optical performance. Ideal for both accent and general lighting applications. It is equipped with an anti-glare filter for flush mount optics, and a CRI of 98 and R9 of 93.

Un projecteur réglable conçu pour les installations encastrées, doté d'un design minimaliste et de performances optiques supérieures. Il est idéal pour les applications d'éclairage d'accentuation et d'éclairage général. Il est équipé d'un filtre antireflet pour les optiques encastrées, d'un IRC de 98 et d'un R9 de 93.

Projector orientable diseñado para instalaciones empotradas, con un diseño minimalista y un rendimiento óptico superior. Ideal tanto para aplicaciones de acento como de iluminación general. Está equipado con un filtro antideslumbrante para ópticas empotradas, y un CRI de 98 y un R9 de 93.



IP20

Class 2



made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
Static White: 500mA (V,9V)
Dim To Warm: 250mA (V, 18V)

Power

Pouissance
Potencia
Static White: 4,5W
Dim To Warm: 4,5W

Series wiring

Câblage en série
Cableado en serie

LED selection

Sélection des LED
Selección del LED
2-Step MacAdam

CRI


98

Lumens

2400K — 406 lm
2700K — 517 lm
3000K — 541 lm
3500K — 548 lm
4000K — 541 lm
DW — 358 lm


Dimensions

Dimensiones



Photometric diagrams


Diagrammes photométriques
Diagramas fotométricos



Code construction

Construction du code produit
Construcción del código de producto

ELJR6 X X X

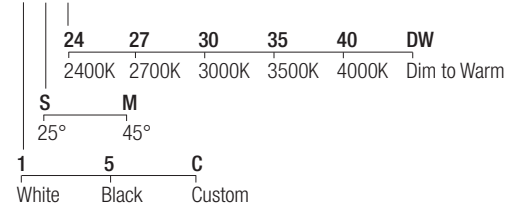

Accessories

Accessoires


Accesorios

AT064R01040

Airtight recessed housing for insulated ceiling

IC064R01040

Recessed housing for insulated ceiling




MP-R040

Baseplate



R01040

T-bar baseplate



Static White 500mA drivers

Static White Alimentateurs 500mA
Static White Alimentadores 500mA

CCPRO10A-500 (1..2) IP20

Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20

Dimming: PHASE - 0-10V

Dim to Warm 250mA drivers

Dim to Warm Alimentateurs 250mA
Dim to Warm Alimentadores 250mA

CCPRO10A-250-DW (1..2) IP20

Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20

Dimming: PHASE - 0-10V