

**ELIJAH T10**  
Trimless projector


IP20 Class 2  us made in Canada

design Jude Allen

An adjustable projector designed for recessed trimless installations, featuring a minimalist design and superior optical performance. Ideal for both accent and general lighting applications. It is equipped with an anti-glare filter and R9 of 93.

Projecteur réglable conçu pour les installations encastrées sans garniture, doté d'un design minimaliste et de performances optiques supérieures. Il est idéal pour les applications d'éclairage d'accentuation et d'éclairage général. Il est équipé d'un filtre antireflet et d'un R9 de 93.


Projector orientable diseñado para instalaciones empotradas sin marco, con un diseño minimalista y un rendimiento óptico superior. Ideal tanto para aplicaciones de acento como de iluminación general. Está equipado con un filtro antideslumbrante y R9 de 93.



Supply current	Power	Series wiring
Courant d'alimentation	Pouissance	Câblage en série
Corriente de alimentación	Potencia	Cableado en serie
Static White: 500mA (V,18V)	Static White: 9W	
Dim To Warm: 400mA (V,18V)	Dim To Warm: 7,2W	
LED selection	CRI	Lumens
Sélection des LED	98	2400K — 744 lm
Selección del LED		2700K — 1088 lm
2-Step MacAdam		3000K — 1142 lm
		3500K — 1156 lm
		4000K — 1139 lm
		DW — 645 lm

**Dimensions**


Dimensiones



**Code construction**

Construction du code produit


Construcción del código de producto

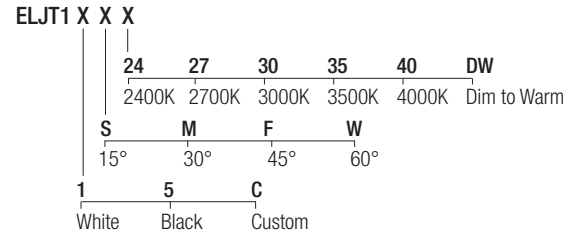

**Photometric diagrams**

Diagrammes photométriques

Diagramas fotométricos

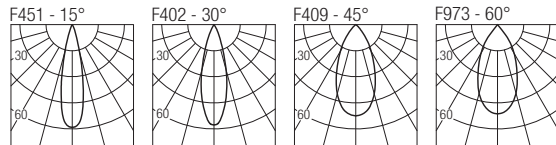

**Accessories**

Accessoires


Accesorios

**AT064R01045**

Airtight recessed housing for insulated ceiling

**IC064R01045**

Recessed housing for insulated ceiling




**MP-R045**

Baseplate



**R01045**

T-bar baseplate



**ZQC001 White**

Plasterboard recessing frame



**ZQC001.BMK-WH White**

**ZQC001.BMK-BLK Black**

**ZQC001.BMK-CU Custom**

Backmount frame for hard surfaces



**Static White 500mA drivers**

Static White Alimentateurs 500mA

Static White Alimentadores 500mA

**CCPRO10A-500 (1) IP20**

Dimming: PHASE - 0-10V

**CCPRO40A-500 (1..3) IP20**

Dimming: PHASE - 0-10V

**Dim to Warm 400mA drivers**

Dim to Warm Alimentateurs 400mA

Dim to Warm Alimentadores 400mA

**CCPRO10A-400 (1) IP20**

Dimming: PHASE - 0-10V

**CCPRO40A-400 (1..3) IP20**

Dimming: PHASE - 0-10V