


**ELIJAH T6**  
Trimless projector

design Jude Allen

An adjustable projector designed for recessed trimless installations, featuring a minimalist design and superior optical performance. Ideal for both accent and general lighting applications. It is equipped with an anti-glare filter and R9 of 93.

Projecteur réglable conçu pour les installations encastrées sans garniture, doté d'un design minimaliste et de performances optiques supérieures. Il est idéal pour les applications d'éclairage d'accentuation et d'éclairage général. Il est équipé d'un filtre antireflet et d'un R9 de 93.

Proyector orientable diseñado para instalaciones empotradas sin marco, con un diseño minimalista y un rendimiento óptico superior. Ideal tanto para aplicaciones de acento como de iluminación general. Está equipado con un filtro antideslumbrante y R9 de 93.



IP20 Class 2  made in Canada

**Supply current**

Courant d'alimentation  
Corriente de alimentación  
Static White: 500mA (V<sub>9V</sub>)  
Dim To Warm: 250mA (V<sub>18V</sub>)

**Power**

Pouissance  
Potencia  
Static White: 4,5W  
Dim To Warm: 4,5W

**Series wiring**

Câblage en série  
Cableado en serie

**LED selection**

Sélection des LED  
Selección del LED  
2-Step MacAdam

**CRI**


98

**Lumens**

2400K — 406 lm  
2700K — 517 lm  
3000K — 541 lm  
3500K — 548 lm  
4000K — 541 lm  
DW — 358 lm


**Dimensions**

Dimensiones



**Photometric diagrams**


Diagrammes photométriques  
Diagramas fotométricos



**Code construction**

Construction du code produit  
Construcción del código de producto

**ELJT6 X X X**

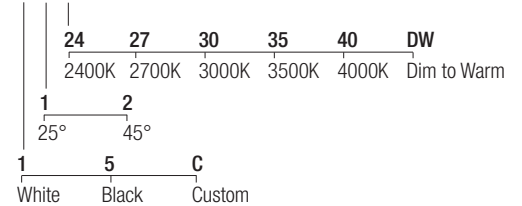

**Accessories**

Accessoires  
Accesorios

**AT064R01045**

Airtight recessed housing for insulated ceiling

**IC064R01045**

Recessed housing for insulated ceiling

**MP-R045**

Baseplate

**R01045**

T-bar baseplate

**ZQC001 White**



Plasterboard recessing frame

**ZQC001.BMK-WH White**

**ZQC001.BMK-BLK Black**

**ZQC001.BMK-CU Custom**

Backmount frame for hard surfaces



**Static White 500mA drivers**

Static White Alimentateurs 500mA  
Static White Alimentadores 500mA

**CCPR010A-500 (1..2) IP20**

Dimming: PHASE - 0-10V

**CCPR040A-500 (1..6) IP20**

Dimming: PHASE - 0-10V

**Dim to Warm 250mA drivers**

Dim to Warm Alimentateurs 250mA  
Dim to Warm Alimentadores 250mA

**CCPR010A-250-DW (1..2) IP20**

Dimming: PHASE - 0-10V

**CCPR040A-250-DW (1..3) IP20**

Dimming: PHASE - 0-10V