


**ELO T10**  
Trimless projector

design Jude Allen

An adjustable projector designed for recessed trimless installations, featuring a minimalist design and superior optical performance. Ideal for accent, general lighting, and wall wash applications. Equipped with recessed optics and a 30 degree snoot, and CRI98 COB technology. Additionally, it can be equipped with an anti-glare filter to enhance visual comfort.

Projecteur réglable conçu pour les installations encastrées sans garniture, doté d'un design minimaliste et de performances optiques supérieures. Idéal pour l'éclairage d'accentuation, l'éclairage général et les applications d'éclairage mural. Équipé d'une optique encastrée et d'un snoot de 30 degrés, et de la technologie CRI98 COB. En outre, il peut être équipé d'un filtre anti-éblouissement pour améliorer le confort visuel.

Projector orientable diseñado para instalaciones empotradas sin marco, con un diseño minimalista y un rendimiento óptico superior. Ideal para aplicaciones de acento, iluminación general y bañado de paredes. Equipado con óptica empotrada y un snoot de 30 grados, y tecnología COB CRI98. Además, puede equiparse con un filtro antideslumbrante para mejorar el confort visual.



IP20 Class 2  us made in Canada

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
Static White: 500mA (V<sub>i</sub>18V)  
Dim To Warm: 400mA (V<sub>i</sub>18V)

**Power**  
Puissance  
Potencia  
Static White: 9W  
Dim To Warm: 7,2W

**Series wiring**  
Câblage en série  
Cableado en serie


**LED selection**  
Sélection des LED  
Selección del LED  
2-Step MacAdam

**CRI**  
98

**Lumens**  
2400K — 744 lm  
2700K — 1088 lm  
3000K — 1142 lm  
3500K — 1156 lm  
4000K — 1139 lm  
DW — 645 lm

**Dimensions**


Dimensiones

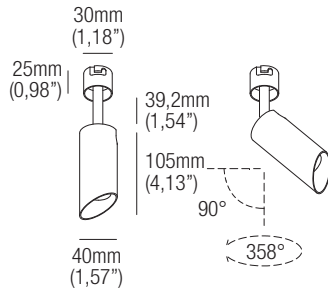

**Code construction**


Construction du code produit  
Construcción del código de producto

**ELOT1 X X X**

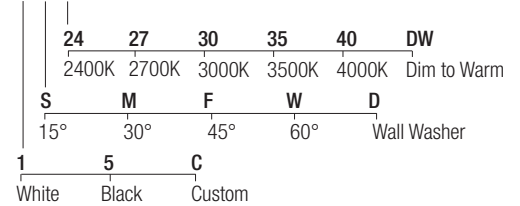

**Photometric diagrams**

Diagrammes photométriques  
Diagramas fotométricos

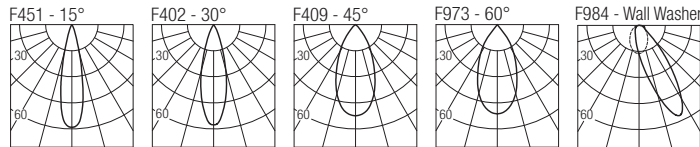


**Accessories**

Accessoires  
Accesorios

**AT064R01045**

Airtight recessed housing for insulated ceiling



**IC064R01045**

Recessed housing for insulated ceiling


**MP-R045**

Baseplate



**R01045**

T-bar baseplate



**ZQC001 White**

Plasterboard recessing frame




**ZQC001.BMK-WH White**

**ZQC001.BMK-BLK Black**

**ZQC001.BMK-CU Custom**

Backmount frame for hard surfaces



**LH02**

Low luminance hex louvre 

**Static White 500mA drivers**

Static White Alimentateurs 500mA  
Static White Alimentadores 500mA

**CCPR010A-500 (1) IP20**

Dimming: PHASE - 0-10V

**CCPR040A-500 (1..3) IP20**

Dimming: PHASE - 0-10V

**Dim to Warm 400mA drivers**

Dim to Warm Alimentateurs 400mA  
Dim to Warm Alimentadores 400mA

**CCPR010A-400 (1) IP20**

Dimming: PHASE - 0-10V

**CCPR040A-400 (1..3) IP20**

Dimming: PHASE - 0-10V