


ERIS

IP-rated downlight

design Roberto Mantovani

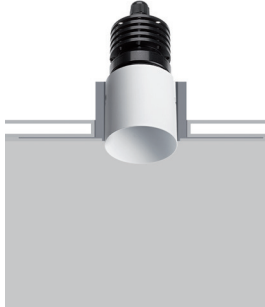

IP67, 24VDC trimless downlights with the highest manufacturing quality, extremely compact and high light output. The recessed optic offers utmost visual comfort. Fully anodized aluminium body, with front in AISI 316L stainless steel or in anodized, powder-coated aluminium. Extra-clear tempered glass, ATEX cable gland, neoprene cable. Can be equipped with an anti-glare filter for maximum visual comfort.

Encastrables trimless IP67 de très haute qualité constructive alimentés à 24VDC, avec des dimensions extrêmement contenues et flux lumineux élevés. L'optique en retrait garantit un confort visuel élevé. Corps en aluminium anodisé à épaisseur, avec frontal en acier INOX AISI316L ou en aluminium anodisé et peint en poudre. Verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène. Peut être équipés avec filtre anti-éblouissement pour le meilleur confort visuel.

Empotrados trimless IP67 de altísima calidad constructiva, alimentados con 24VDC, con tamaño sumamente reducido y elevados flujos luminosos. La óptica retrocedida garantiza un alto confort visual. Cuerpo de aluminio anodizado a ras, con frontal de acero inoxidable AISI316L o de aluminio anodizado y barnizado en polvo. Vidrio ultraclaro templado, prensacables ATEX, cable de neopreno. Se pueden equipar con filtro antideslumbramiento para obtener el máximo confort visual.

IP67 Class 2  made in Canada

Supply current
Courant d'alimentation
Corriente de alimentación
24VDC

Power
Puissance
Potencia
7,5W

Parallel wiring
Câblage en parallèle
Cableado paralelo


LED selection
Sélection des LED
Selección del LED
2-Step MacAdam

CRI
98

Lumens
2400K — 487 lm
2700K — 504 lm
3000K — 530 lm
3500K — 543 lm
4000K — 556 lm

Dimensions


Dimensiones

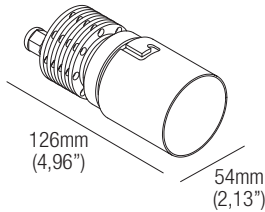

Photometric diagrams

Diagrammes photométriques


Diagramas fotométricos

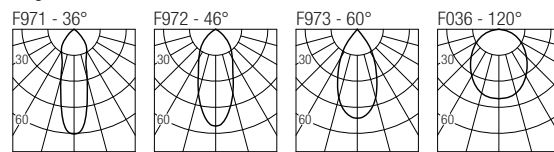

Code construction

Construction du code produit

Construcción del código de producto

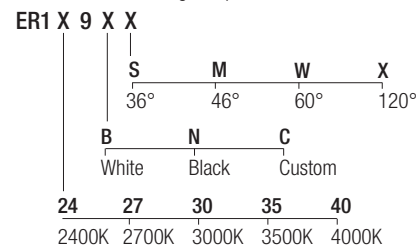


Accessories

Accessoires

Accesorios

AT086R02070

Airtight recessed housing for insulated ceiling



IC086R02070

Recessed housing for insulated ceiling


MP-R070

Baseplate




R02070

T-bar baseplate



ZTC10U White

Plasterboard recessing frame




ZTC10U.BMK-WH White

ZTC10U.BMK-BLK Black

ZTC10U.BMK-CU Custom

Backmount frame for hard surfaces



LOD1

Low luminance hex louvre 

24VDC drivers

Alimentateurs 24VDC

Alimentadores 24VDC

DLM.30 (1..3) IP20

Dimming: PHASE - 0-10V

DLM.60 (1..7) IP20

Dimming: PHASE - 0-10V

DLM.100 (1..12) IP20

Dimming: PHASE - 0-10V