

**FLEXUS 10**  
Flush optic downlight

design Rod&Todd

A small and shallow downlight characterized by a minimal design and high optical performance. Equipped with CRI85 or CRI93 LEDs, it lends itself to applications ranging from accent to general illumination. Thanks to the use of highly-advanced optics, it offers narrow and precise light beams. Can be fitted with an anti-glare filter for maximum visual comfort.

Encastrable à plafond petit et peu profond caractérisé par un design minimal et des performances optiques élevées. Équipé de LEDs avec CRI85 ou CRI93, il se prête à des applications allant de l'accentuation à l'éclairage général. Grâce à l'utilisation d'optiques avancées, il offre des faisceaux lumineux étroits et précis. Peut être équipé d'un filtre anti-éblouissement pour un confort visuel maximal.

Un downlight pequeño y poco profundo que se caracteriza por un diseño minimalista y un alto rendimiento óptico. Equipado con LED CRI85 o CRI93, se presta a aplicaciones que van desde acento hasta iluminación general. Gracias al uso de ópticas muy avanzadas, ofrece haces de luz estrechos y precisos. Se puede equipar con un filtro antideslumbramiento para un máximo confort visual.



IP20 Class 2



JA8 made in Canada

**Supply current**

Courant d'alimentation  
Corriente de alimentación  
Static White: 500mA (V<sub>i</sub>18V)  
Dim To Warm: 400mA (V<sub>i</sub>18V)  
Tunable White: 500mA (V<sub>i</sub>18V)

**Power**

Pouissance  
Potencia  
Static White: 9W  
Dim To Warm: 7,2W  
Tunable White: 9W

**Series wiring**

Câblage en série  
Cableado en serie

**LED selection**

Sélection des LED  
Selección del LED  
2-Step MacAdam

**CRI**


98

**Lumens**

2400K **770 lm**  
2700K **1125 lm**  
3000K **1180 lm**  
3500K **1195 lm**  
4000K **1178 lm**  
DW **667 lm**  
TW **875 lm**


**Dimensions**

Dimensiones

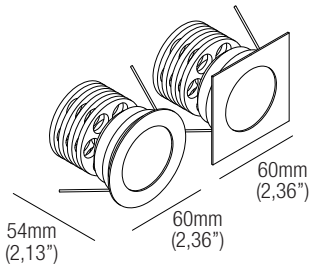

**Photometric diagrams**

Diagrammes photométriques  
Diagramas fotométricos

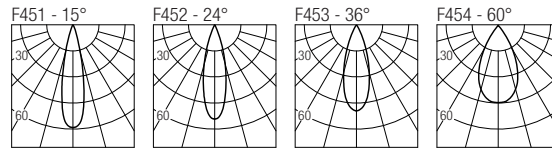

**Code construction**

Construction du code produit  
Construcción del código de producto

FX	1	X	5	X	C	X	24	X	27	X	30	X	35	X	40	DW	TW
	Round		White		Black		2400K		2700K		3000K		3500K		4000K	Dim to Warm	Tunable White

**Accessories**

Accessoires


Accesorios

**AT064R01055**

Airtight recessed housing for insulated ceiling

**IC064R01055**

Recessed housing for insulated ceiling




**MP-R055**

Baseplate



**R01055**

T-bar baseplate



**LH04**

Low luminance hex louvre



**Static White 500mA drivers**

Static White Alimentateurs 500mA  
Static White Alimentadores 500mA

**CCPR010A-500** (1) IP20

Dimming: PHASE - 0-10V

**CCPR040A-500** (1..3) IP20

Dimming: PHASE - 0-10V

**Dim to Warm 400mA drivers**

Dim to Warm Alimentateurs 400mA  
Dim to Warm Alimentadores 400mA

**CCPR010A-400** (1) IP20

Dimming: PHASE - 0-10V

**CCPR040A-400** (1..3) IP20

Dimming: PHASE - 0-10V

**Tunable White 500mA drivers**

Tunable White Alimentateurs 500mA  
Tunable White Alimentadores 500mA

**DL0561S1** (1..3) IP20

Dimming: 0-10V