

**FLEXUS 20**  
Flush optic downlight

design Rod&Todd



A small and shallow downlight with a minimalist design and high optical performance. Equipped with very high flux CR98 LEDs, it is suitable for applications ranging from accent to general lighting. Thanks to the use of advanced optics, it provides narrow and precise light beams. Can be fitted with an anti-glare filter for maximum visual comfort.

Un petit downlight peu profond au design minimaliste et aux performances optiques élevées. Équipé de LED CR98 à très haut flux, il convient aux applications allant de l'éclairage d'accentuation à l'éclairage général. Grâce à l'utilisation d'une optique avancée, il produit des faisceaux lumineux étroits et précis. Il peut être équipé d'un filtre anti-éblouissement pour un confort visuel maximal.

Un downlight pequeño y poco profundo con un diseño minimalista y un alto rendimiento óptico. Equipado con LED CR98 de flujo muy elevado, es adecuado para aplicaciones que van desde la iluminación de acento a la iluminación general. Gracias al uso de una óptica avanzada, proporciona haces de luz estrechos y precisos. Puede equiparse con un filtro antideslumbrante para un máximo confort visual.



IP20 Class 2



made in Canada

**Supply current**

Courant d'alimentation  
Corriente de alimentación  
500mA (V,36V)

**Power**

Puissance  
Potencia  
18W

**LED selection**

Sélection des LED  
Selección del LED  
2-Step MacAdam


**CRI**  
98

**Lumens**

2700K — 2165 lm  
3000K — 2279 lm  
3500K — 2498 lm  
4000K — 2423 lm

**Dimensions**


Dimensiones



**Photometric diagrams**

Diagrammes photométriques

Diagramas fotométricos

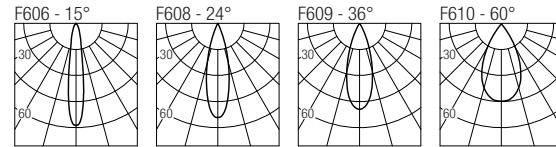


**Code construction**

Construction du code produit

Construcción del código de producto

**FX2 X X X**




**Accessories**

Accessoires

Accesorios

**AT064R01060**

Airtight recessed housing for insulated ceiling




**IC064R01060**

Recessed housing for insulated ceiling


**MP-R060**

Baseplate



**R01060**

T-bar baseplate



**LH06**

Low luminance hex louvre



**500mA drivers**

Alimentateurs 500mA

Alimentadores 500mA

**CCPRO40A-500 (1) IP20**

Dimming: PHASE - 0-10V