


**GLASS 10**  
Uplight

design Roberto Mantovani

A walkable IP67 for ground recessing of the highest build quality and with a glass front. Extremely small dimensions combine with elevated luminous fluxes. With a body in thick anodised aluminium, it has tempered extra-clear glass, an ATEX cable gland and neoprene cable. Can be fitted with an anti-glare filter for maximum visual comfort.

Spots à encastrer au sol IP67 de très haute qualité de construction, avec façade en verre. Dimensions extrêmement limitées et à flux lumineux élevés. Corps en aluminium anodisé épais, verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène. Peut être équipé de filtre anti-éblouissement pour le plus grand confort visuel.

Luminarias empotrables de suelo IP67 transitables de muy alta calidad de fabricación, con frente de vidrio. Dimensiones extremadamente reducidas y elevados flujos luminosos. Cuerpo grueso de aluminio anodizado, cristal extraclaro templado, prensaestopas ATEX, cable de neopreno. Se puede equipar con un filtro antideslumbrante para un máximo confort visual.



IP67 Class 2   made in Canada

**Supply current**

Courant d'alimentation  
Corriente de alimentación  
Static White: 500mA (V<sub>i</sub>18V)  
Dim To Warm: 400mA (V<sub>i</sub>18V)

**Power**

Pouissance  
Potencia  
Static White: 9W  
Dim To Warm: 7,2W

**Series wiring**

Câblage en série  
Cableado en serie

**LED selection**

Sélection des LED  
Selección del LED  
2-Step MacAdam

**CRI**


98

**Lumens**

2400K 728 lm  
2700K 1064 lm  
3000K 1116 lm  
3500K 1130 lm  
4000K 1114 lm  
DW 630 lm

**Dimensions**


Dimensiones



**Photometric diagrams**

Diagrammes photométriques

Diagramas fotométricos

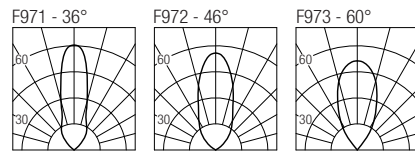


**Code construction**

Construction du code produit

Construcción del código de producto

**GS1 X X**

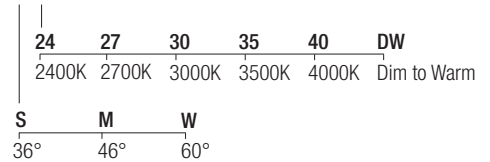

**Accessories**

Accessoires

Accesorios

**CSGS07**

Recessing box



**LH01**

Low luminance hex louvre 

**Static White 500mA drivers**

Static White Alimentateurs 500mA  
Static White Alimentadores 500mA

**CCPRO10A-500 (1) IP20**

Dimming: PHASE - 0-10V

**CCPRO40A-500 (1..3) IP20**

Dimming: PHASE - 0-10V

**Dim to Warm 400mA drivers**

Dim to Warm Alimentateurs 400mA  
Dim to Warm Alimentadores 400mA

**CCPRO10A-400 (1) IP20**

Dimming: PHASE - 0-10V

**CCPRO40A-400 (1..3) IP20**

Dimming: PHASE - 0-10V