


HOLE

Trimless downlight

design Roberto Mantovani

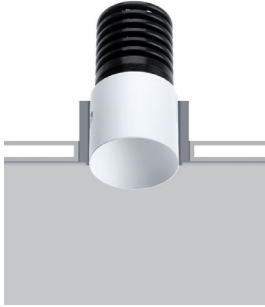

The range of Hole 24 VDC trimless downlights combines high performance and incredible compactness. The recessed optic offers utmost visual comfort. Revolutionary in dissipative, functional design, it offers the possibility to combine colour temperatures and beam angles in CRI85 and CRI93 versions.

La gamme d'encastres trimless Hole, alimentés à 24VDC, associe prestations très élevées et dimension incroyablement contenue. L'optique en retrait garantit un confort visuel élevé. Révolutionnaires pour le design fonctionnel à la dissipation, ils offrent la possibilité d'associer températures, couleur et ouvertures de faisceau dans les versions à CRI85 et à CRI93.

La gama de empotrados trimless Hole, alimentados con 24VDC combina elevadas prestaciones con un tamaño increíblemente reducido. La óptica retrocedida garantiza un alto confort visual. Revolucionarios por su diseño centrado en la disipación, ofrecen la posibilidad de combinar temperaturas de color y aperturas de haz en las versiones de CRI85 y de CRI93.

IP20 Class 2  made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
24 VDC

Power

Pouissance
Potencia
7,5W

LED selection

Sélection des LED
Selección del LED
2-Step MacAdam

Parallel wiring

Câblage en parallèle
Cableado paralelo

CRI


98

Lumens

2400K — 487 lm
2700K — 655 lm
3000K — 688 lm
3500K — 697 lm
4000K — 686 lm

Dimensions


Dimensiones



Photometric diagrams

Diagrammes photométriques

Diagramas fotométricos

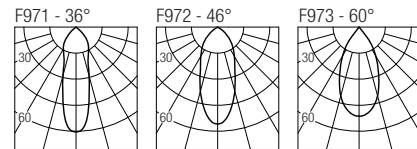

Code construction

Construction du code produit

Construcción del código de producto

HH X X 9 X

	S	M	W	
	36°	46°	60°	
24	27	30	35	40
2400K	2700K	3000K	3500K	4000K
1	5	C		
White	Black	Custom		

Accessories

Accessoires


Accesorios

AT064R01055

Airtight recessed housing for insulated ceiling

IC064R01055

Recessed housing for insulated ceiling




MP-R055

Baseplate




R01055

T-bar baseplate



ZQH001 White

Plasterboard recessing frame




ZQH001.BMK-WH White


ZQH001.BMK-BLK Black

ZQH001.BMK-CU Custom

Backmount frame for hard surfaces



LH01

Low luminance hex louvre 

24VDC drivers

Alimentateurs 24 VDC

Alimentadores 24 VDC

DLM.30 (1..3) IP20

Dimming: PHASE - 0-10V

DLM.60 (1..7) IP20

Dimming: PHASE - 0-10V

DLM.100 (1..12) IP20

Dimming: PHASE - 0-10V