

JOEL 6

Adjustable downlight

design Roberto Mantovani

The Joel range combines extremely small dimensions with luminous fluxes suited to general lighting. Equipped with the LED Fidelity, it is designed for a CRI98 and R9 93. The embedded optics ensures high visual comfort, which can be maximised with the use of an anti-glare filter.

La gamme Joel combine des dimensions extrêmement réduites avec des flux lumineux adaptés à l'éclairage général. Équipé de LED Fidelity, les appareils se caractérisent par un IRC98 et R9 93. L'optique encastrée assure un confort visuel élevé, qui peut être maximisé par l'utilisation d'un filtre anti-éblouissement.

La gama Joel combina dimensiones extremadamente pequeñas con flujos luminosos adecuados para iluminaciones generales. Equipada con LED Fidelity, se caracteriza por un CRI98 y R9 93. La óptica empotrada garantiza un gran confort visual, que se puede maximizar utilizando el filtro antideslumbrante.



IP20 Class 2



JA8

made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
Static White: 500mA (V,9V)
Dim To Warm: 250mA (V, 18V)

Power

Pouissance
Potencia
Static White: 4,5W
Dim To Warm: 4,5W

Series wiring

Câblage en série
Cableado en serie

LED selection

Sélection des LED
Selección del LED
2-Step MacAdam


CRI
98

Lumens

2400K	406 lm
2700K	517 lm
3000K	541 lm
3500K	548 lm
4000K	541 lm
DW	358 lm


Dimensions

Dimensiones



Photometric diagrams


Diagrammes photométriques
Diagramas fotométricos

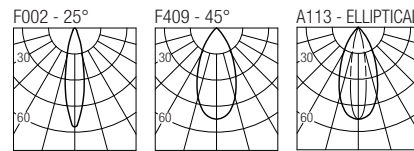

Code construction

Construction du code produit
Construcción del código de producto

JL6E X X X X

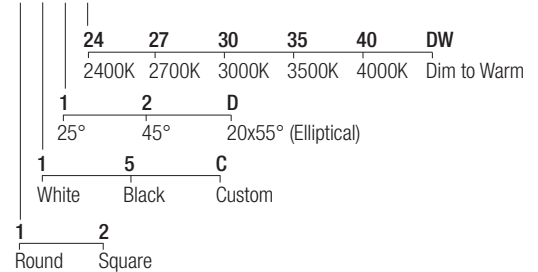


Accessories

Accessoires
Accesorios

AT064R01060

Airtight recessed housing for insulated ceiling



IC064R01060

Recessed housing for insulated ceiling


MP-R060

Baseplate



R01060

T-bar baseplate



ZQS001 White

Plasterboard recessing frame



ZQS001.BMK-WH White

ZQS001.BMK-BLK Black

ZQS001.BMK-CU Custom
Backmount frame for hard surfaces



LH03

Low luminance hex louvre



Static White 500mA drivers

Static White Alimentateurs 500mA
Static White Alimentadores 500mA

CCPR010A-500 (1..2) IP20

Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20

Dimming: PHASE - 0-10V

Dim to Warm 250mA drivers

Dim to Warm Alimentateurs 250mA
Dim to Warm Alimentadores 250mA

CCPR010A-250-DW (1..2) IP20

Dimming: PHASE - 0-10V

CCPR040A-250-DW (1..3) IP20

Dimming: PHASE - 0-10V