

**JOS T10**  
Trimless projector

design Roberto Mantovani

An adjustable projector designed for recessed trimless installations, featuring a minimalist design and superior optical performance. Ideal for both accent and general lighting applications. With recessed optics, with a CRI of 98 and R9 of 93. Additionally, it can be equipped with an anti-glare filter to enhance visual comfort.

Projecteur réglable conçu pour les installations encastrées sans garniture, doté d'un design minimaliste et de performances optiques supérieures. Idéal pour les applications d'éclairage d'accentuation et d'éclairage général. Optique encastrée, avec un IRC de 98 et un R9 de 93. En outre, il peut être équipé d'un filtre anti-éblouissement pour améliorer le confort visuel.

Projector orientable diseñado para instalaciones empotradas sin marco, con un diseño minimalista y un rendimiento óptico superior. Ideal tanto para aplicaciones de acento como de iluminación general. Con óptica empotrable, con un CRI de 98 y un R9 de 93. Además, puede equiparse con un filtro antideslumbrante para mejorar el confort visual.




IP20 Class 2  made in Canada

<b>Supply current</b>	<b>Power</b>	<b>Series wiring</b>
Courant d'alimentation	Pouissance	Câblage en série
Corriente de alimentación	Potencia	Cableado en serie
Static White: 500mA (V <sub>i</sub> 18V)	Static White: 9W	
Dim To Warm: 400mA (V <sub>i</sub> 18V)	Dim To Warm: 7,2W	

<b>LED selection</b>	<b>CRI</b>	<b>Lumens</b>
Sélection des LED	98	2400K — 728 lm
Selección del LED		2700K — 1064 lm
2-Step MacAdam		3000K — 1116 lm
		3500K — 1130 lm
		4000K — 1114 lm
		DW — 630 lm


**Dimensions**

Dimensiones

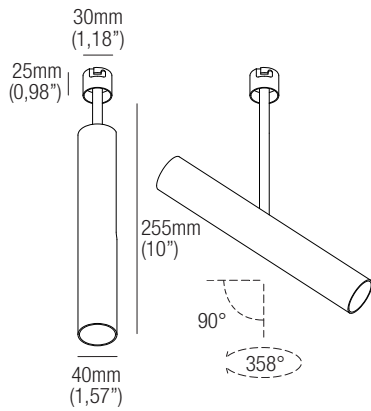


**Photometric diagrams**

Diagrammes photométriques  
Diagramas fotométricos

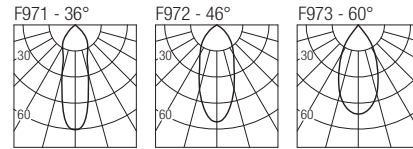

**Code construction**

Construction du code produit  
Construcción del código de producto

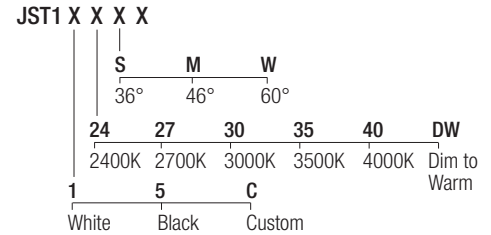


**Accessories**

Accessoires

Accesorios

**AT064R01045**

Airtight recessed housing for insulated ceiling



**IC064R01045**

Recessed housing for insulated ceiling


**MP-R045**

Baseplate



**R01045**

T-bar baseplate



**ZQC001 White**

Plasterboard recessing frame




**ZQC001.BMK-WH White**

**ZQC001.BMK-BLK Black**

**ZQC001.BMK-CU Custom**

Backmount frame for hard surfaces



**LJ01 (White) - LJ01B (Black)**

Low luminance hex louvre



**Static White 500mA drivers**

Static White Alimentateurs 500mA

Static White Alimentadores 500mA

**CCPR010A-500 (1) IP20**

Dimming: PHASE - 0-10V

**CCPR040A-500 (1..3) IP20**

Dimming: PHASE - 0-10V

**Dim to Warm 400mA drivers**

Dim to Warm Alimentateurs 400mA

Dim to Warm Alimentadores 400mA

**CCPR010A-400 (1) IP20**

Dimming: PHASE - 0-10V

**CCPR040A-400 (1..3) IP20**

Dimming: PHASE - 0-10V