

JOS T6

Trimless projector

design Roberto Mantovani

An adjustable projector designed for recessed trimless installations, featuring a minimalist design and superior optical performance. Ideal for both accent and general lighting applications. With recessed optics, with a CRI of 98 and R9 of 93. Additionally, it can be equipped with an anti-glare filter to enhance visual comfort.

Projecteur réglable conçu pour les installations encastrées sans garniture, doté d'un design minimaliste et de performances optiques supérieures. Idéal pour les applications d'éclairage d'accentuation et d'éclairage général. Optique encastrée, avec un IRC de 98 et un R9 de 93. En outre, il peut être équipé d'un filtre anti-éblouissement pour améliorer le confort visuel.

Projector orientable diseñado para instalaciones empotradas sin marco, con un diseño minimalista y un rendimiento óptico superior. Ideal tanto para aplicaciones de acento como de iluminación general. Con óptica empotrable, con un CRI de 98 y un R9 de 93. Además, puede equiparse con un filtro antideslumbrante para mejorar el confort visual.



IP20 Class 2  made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
Static White: 500mA (V,9V)
Dim To Warm: 250mA (V,18V)

Power

Pouissance
Potencia
Static White: 4,5W
Dim To Warm: 4,5W

Series wiring

Câblage en série
Cableado en serie

LED selection

Sélection des LED
Selección del LED
2-Step MacAdam

CRI


98

Lumens

2400K **406 lm**
2700K **517 lm**
3000K **541 lm**
3500K **548 lm**
4000K **541 lm**
DW **358 lm**


Dimensions

Dimensiones

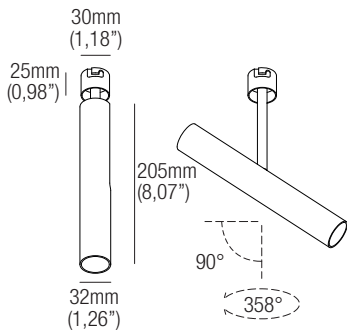

Photometric diagrams


Diagrammes photométriques
Diagramas fotométricos

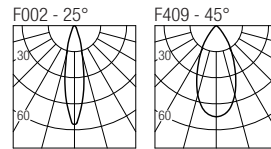

Code construction

Construction du code produit
Construcción del código de producto

JST6 X X X

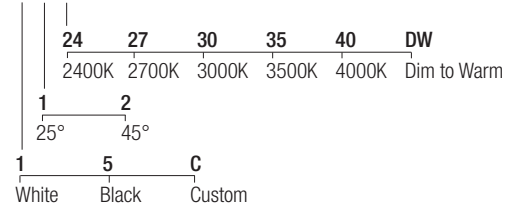

Accessories

Accessoires


Accessorios

AT064R01045

Airtight recessed housing for insulated ceiling

IC064R01045

Recessed housing for insulated ceiling




MP-R045

Baseplate



R01045

T-bar baseplate



ZQC001 White

Plasterboard recessing frame



ZQC001.BMK-WH White

ZQC001.BMK-BLK Black

ZQC001.BMK-CU Custom

Backmount frame for hard surfaces



LJ02 (White) - LJ02B (Black)

Low luminance hex louvre



Static White 500mA drivers

Static White Alimentateurs 500mA
Static White Alimentadores 500mA

CCPRO10A-500 (1..2) IP20

Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20

Dimming: PHASE - 0-10V

Dim to Warm 250mA drivers

Dim to Warm Alimentateurs 250mA

Dim to Warm Alimentadores 250mA

CCPRO10A-250-DW (1..2) IP20

Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20

Dimming: PHASE - 0-10V