

LOLLO 20
Adjustable downlight

design Lapo Grassellini



The Lollo range of orientable, recessed fixtures offers high performance in extremely compact dimensions. Its highly innovative dissipative system and off-axis inclination offer a 45° orientation of the full beam out from the ceiling, in a fixture of minimal yet sophisticated design.

La gamme d'encastables orientables Lollo offre des prestations élevées dans des dimensions extrêmement compactes. L'étude d'un système de dissipation extrêmement innovant, unie à l'inclinaison hors de l'axe de l'appareil, permet une orientabilité de 45° qui maintient tout le flux lumineux hors du niveau du plafond, dans un appareil au design minimaliste et sophistiqué.

La gama de empotrados orientables Lollo ofrece altas prestaciones en tamaños sumamente compactos. El estudio de un sistema de disipación sumamente innovador, junto con la inclinación fuera del eje del aparato, permite una orientación de 45° que mantiene todo el flujo luminoso fuera del ras del techo, en un aparato de diseño minimalista y sofisticado.



IP20

Class 2



JA8

made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
500mA (V,36V)

Power

Puissance
Potencia
18W

LED selection

Sélection des LED
Selección del LED
2-Step MacAdam

CRI
98

Lumens

2700K — 1659 lm
3000K — 1752 lm
3500K — 1873 lm
4000K — 1925 lm

Dimensions

Dimensions


130mm
(5,12")

128mm
(5,04")

130mm
(5,12")

45°


358°



Photometric diagrams

Diagrammes photométriques

Diagramas fotométricos

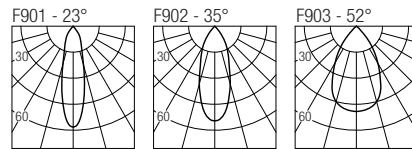

Code construction

Construction du code produit

Construcción del código de producto

LL2 X X 9 X

	S	M	W
	23°	35°	52°
	27	30	35
	2700K	3000K	3500K
	40		
	4000K		
1	5	C	
White	Black	Custom	

Accessories

Accessoires


Accesorios

AT086Q02115

Airtight recessed housing for insulated ceiling


IC086Q02115

Recessed housing for insulated ceiling




MP-Q115

Baseplate



Q02115

T-bar baseplate



500mA drivers

Alimentateurs 500mA

Alimentadores 500mA

CCPR040A-500 (1) IP20

Dimming: PHASE - 0-10V