

LOLLO X120
Adjustable downlight

design Lapo Grassellini



The Lollo range of orientable, recessed fixtures offers high performance in extremely compact dimensions. Its highly innovative dissipative system and off-axis inclination offer a 45° orientation of the full beam out from the ceiling, in a fixture of minimal yet sophisticated design.

La gamme d'encastables orientables Lollo offre des prestations élevées dans des dimensions extrêmement compactes. L'étude d'un système de dissipation extrêmement innovant, unie à l'inclinaison hors de l'axe de l'appareil, permet une orientabilité de 45° qui maintient tout le flux lumineux hors du niveau du plafond, dans un appareil au design minimaliste et sophistiqué.

La gama de empotrados orientables Lollo ofrece altas prestaciones en tamaños sumamente compactos. El estudio de un sistema de disipación sumamente innovador, junto con la inclinación fuera del eje del aparato, permite una orientación de 45° que mantiene todo el flujo luminoso fuera del ras del techo, en un aparato de diseño minimalista y sofisticado.




IP20 Class 2 JA8 made in Canada

Supply current	Power	Series wiring
Courant d'alimentation	Puissance	Câblage en série
Corriente de alimentación	Potencia	Cableado en serie
Static White: 500mA (V,2x18V)	Static White: 2x9W	
Dim To Warm: 400mA (V,2x18V)	Dim To Warm: 2x7,2W	
Tunable White: 500mA (V,2x18V)	Tunable White: 2x9W	

LED selection	CRI	Lumens
Sélection des LED	98	2400K — 1456 lm
Selección del LED		2700K — 2128 lm
2-Step MacAdam		3000K — 2232 lm
		3500K — 2260 lm
		4000K — 2228 lm
		DW — 1260 lm
		TW — 1656 lm

Dimensions
Dimensiones

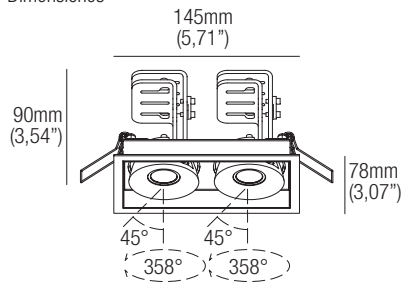

Code construction


Construction du code produit
Construcción del código de producto

LLX12 X X 9 X

S	M	W	D	DW	TW
36°	46°	60°	20x55° (Elliptical)		
24	27	30	35	40	
2400K	2700K	3000K	3500K	4000K	
1	5	C			
White	Black	Custom		Dim to Warm	Tunable White

Photometric diagrams

Diagrammes photométriques
Diagramas fotométricos

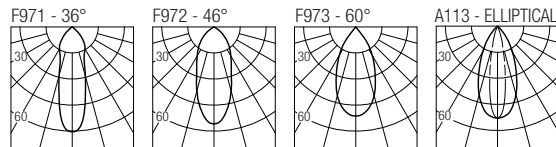


Accessories

Accessoires
Accesorios

AT086X02135

Airtight recessed housing for insulated ceiling




IC086X02135

Recessed housing for insulated ceiling


MP-X135

Baseplate



X02135

T-bar baseplate



2xLH01

Low luminance hex louvre

Static White 500mA drivers

Static White Alimentateurs 500mA
Static White Alimentadores 500mA

(2x) CCPR010A-500 (1) IP20

Dimming: PHASE - 0-10V

CCPR040A-500 (1) IP20

Dimming: PHASE - 0-10V

Dim to Warm 400mA drivers

Dim to Warm Alimentateurs 400mA
Dim to Warm Alimentadores 400mA

(2x) CCPR010A-400 (1) IP20

Dimming: PHASE - 0-10V

CCPR040A-400 (1) IP20

Dimming: PHASE - 0-10V

Tunable White 500mA drivers

Tunable White Alimentateurs 500mA
Tunable White Alimentadores 500mA

DL0561S1 (1) IP20

Dimming: 0-10V