

LOLLO X130

Adjustable downlight

design Lapo Grassellini



The Lollo range of orientable, recessed fixtures offers high performance in extremely compact dimensions. Its highly innovative dissipative system and off-axis inclination offer a 45° orientation of the full beam out from the ceiling, in a fixture of minimal yet sophisticated design.

La gamme d'encastables orientables Lollo offre des prestations élevées dans des dimensions extrêmement compactes. L'étude d'un système de dissipation extrêmement innovant, unie à l'inclinaison hors de l'axe de l'appareil, permet une orientabilité de 45° qui maintient tout le flux lumineux hors du niveau du plafond, dans un appareil au design minimaliste et sophistiqué.

La gama de empotrados orientables Lollo ofrece altas prestaciones en tamaños sumamente compactos. El estudio de un sistema de disipación sumamente innovador, junto con la inclinación fuera del eje del aparato, permite una orientación de 45° que mantiene todo el flujo luminoso fuera del ras del techo, en un aparato de diseño minimalista y sofisticado.



IP20 Class 2



JA8 made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
Static White: 500mA (V,3x18V)
Dim To Warm: 400mA (V,3x18V)
Tunable White: 500mA (V,3x18V)

Power

Pouissance
Potencia
Static White: 3x9W
Dim To Warm: 3x7,2W
Tunable White: 3x9W

Series wiring

Câblage en série
Cableado en serie

LED selection

Sélection des LED
Selección del LED
2-Step MacAdam

CRI


98

Lumens

2400K — 2184 lm
2700K — 3192 lm
3000K — 3348 lm
3500K — 3393 lm
4000K — 3342 lm
DW — 1890 lm
TW — 2484 lm

Dimensions


Dimensiones

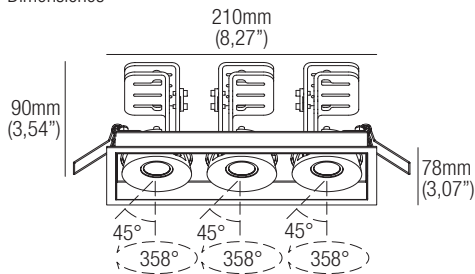

Code construction

Construction du code produit
Construcción del código de producto


LLX13 X X 9 X

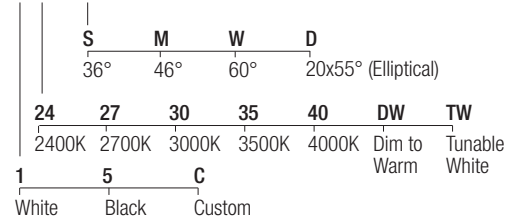

Photometric diagrams

Diagrammes photométriques

Diagramas fotométricos

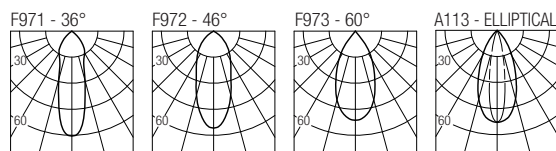


Accessories

Accessoires
Accesorios

AT127X03200

Airtight recessed housing for insulated ceiling




IC127X03200

Recessed housing for insulated ceiling


MP-X200

Baseplate



X03200

T-bar baseplate



3xLH01

Low luminance hex louvre



Static White 500mA drivers

Static White Alimentateurs 500mA
Static White Alimentadores 500mA

(3x) CCPR010A-500 (1) IP20

Dimming: PHASE - 0-10V

CCPRO40A-500 (1) IP20

Dimming: PHASE - 0-10V

Dim to Warm 400mA drivers

Dim to Warm Alimentateurs 400mA
Dim to Warm Alimentadores 400mA

(3x) CCPR010A-400 (1) IP20

Dimming: PHASE - 0-10V

CCPRO40A-400 (1) IP20

Dimming: PHASE - 0-10V

Tunable White 500mA drivers

Tunable White Alimentateurs 500mA
Tunable White Alimentadores 500mA

DL0561S1 (1) IP20

Dimming: 0-10V