

LOLLO X220

Adjustable downlight

design Lapo Grassellini



The Lollo range of orientable, recessed fixtures offers high performance in extremely compact dimensions. Its highly innovative dissipative system and off-axis inclination offer a 45° orientation of the full beam out from the ceiling, in a fixture of minimal yet sophisticated design.

La gamme d'encastrables orientables Lollo offre des prestations élevées dans des dimensions extrêmement compactes. L'étude d'un système de dissipation extrêmement innovant, unie à l'inclinaison hors de l'axe de l'appareil, permet une orientabilité de 45° qui maintient tout le flux lumineux hors du niveau du plafond, dans un appareil au design minimaliste et sophistiqué.

La gama de empotrados orientables Lollo ofrece altas prestaciones en tamaños sumamente compactos. El estudio de un sistema de disipación sumamente innovador, junto con la inclinación fuera del eje del aparato, permite una orientación de 45° que mantiene todo el flujo luminoso fuera del ras del techo, en un aparato de diseño minimalista y sofisticado.

115x230 mm
4,53x9,06"

IP20 Class 2



JA8

made in Canada

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V,2x36V)

Power
Pouissance
Potencia
2x18W


LED selection
Sélection des LED
Selección del LED
2-Step MacAdam

CRI
98

Lumens
2700K 3318 lm
3000K 3504 lm
3500K 3746 lm
4000K 3850 lm


Dimensions

Dimensiones

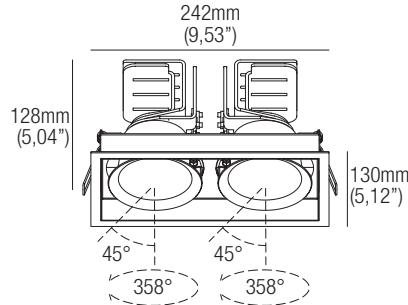

Photometric diagrams


Diagrammes photométriques
Diagramas fotométricos

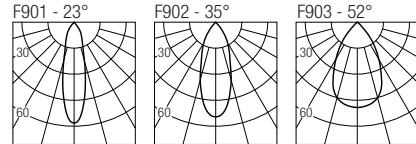

Code construction

Construction du code produit
Construcción del código de producto

LLX22 X X 9 X




Accessories

Accessoires
Accessorios

AT127X03230

Airtight recessed housing for insulated ceiling



IC127X03230


Recessed housing for insulated ceiling

MP-X230
Baseplate



X03230

T-bar baseplate



500mA drivers

Alimentateurs 500mA
Alimentadores 500mA
2xCCPRO40A-500 (1) IP20
Dimming: PHASE - 0-10V