


MILO 10
Trimless downlight

design Lapo Grassellini

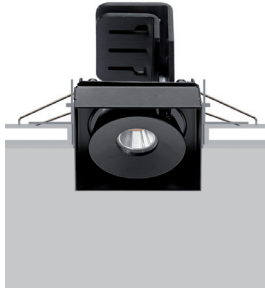

The Milo range of trimless, orientable, recessed fixtures offers high performance in extremely compact dimensions. Its highly innovative dissipative system and off-axis inclination offer a 45° orientation of the full beam out from the ceiling, in a fixture of minimal yet sophisticated design.

La gamme d'encastables orientables trimless Milo offre des prestations élevées dans des dimensions extrêmement compactes. L'étude d'un système de dissipation extrêmement innovant, unie à l'inclinaison hors de l'axe de l'appareil, permet une orientabilité de 45° qui maintient tout le flux lumineux hors du niveau du plafond, dans un appareil au design minimaliste et sophistiqué.

La gama de empotrados orientables trimless Milo ofrece altas prestaciones en tamaños sumamente compactos. El estudio de un sistema de disipación sumamente innovador, junto con la inclinación fuera del eje del aparato, permite una orientación de 45° que mantiene todo el flujo luminoso fuera del ras del techo, en un aparato de diseño minimalista y sofisticado.

IP20 Class 2  JA8 made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
Static White: 500mA (V_i18V)
Dim To Warm: 400mA (V_i18V)
Tunable White: 500mA (V_i18V)

Power

Pouissance
Potencia
Static White: 9W
Dim To Warm: 7,2W
Tunable White: 9W

Series wiring

Câblage en série
Cableado en serie

LED selection

Sélection des LED
Selección del LED
2-Step MacAdam

CRI


98

Lumens

2400K — 728 lm
2700K — 1064 lm
3000K — 1116 lm
3500K — 1130 lm
4000K — 1114 lm
DW — 630 lm
TW — 828 lm

Dimensions


Dimensiones



Photometric diagrams

Diagrammes photométriques


Diagramas fotométricos

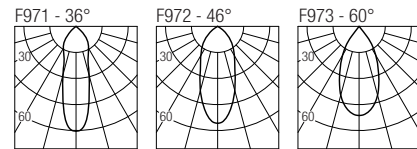

Code construction

Construction du code produit

Construcción del código de producto

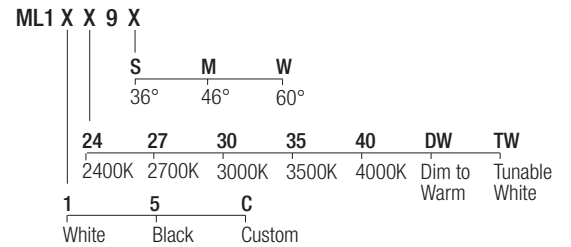


Accessories

Accessoires

Accesorios

AT064Q01077

Airtight recessed housing for insulated ceiling




IC064Q01077

Recessed housing for insulated ceiling


MP-Q077

Baseplate




Q01077

T-bar baseplate



MLX11Q White

Plasterboard recessing frame



MLX11Q.BMK-WH White

Backmount frame for hard surfaces



LH01

Low luminance hex louvre 

Static White 500mA drivers

Static White Alimentateurs 500mA
Static White Alimentadores 500mA

CCPRO10A-500 (1) IP20

Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20

Dimming: PHASE - 0-10V

Dim to Warm 400mA drivers

Dim to Warm Alimentateurs 400mA
Dim to Warm Alimentadores 400mA

CCPRO10A-400 (1) IP20

Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20

Dimming: PHASE - 0-10V

Tunable White 500mA drivers

Tunable White Alimentateurs 500mA
Tunable White Alimentadores 500mA

DL0561S1 (1..3) IP20

Dimming: 0-10V