


MILO X120
Trimless downlight

design Lapo Grassellini

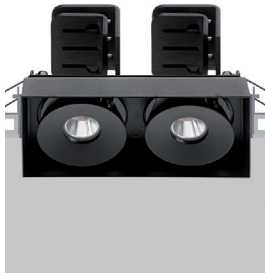

The Milo range of trimless, orientable, recessed fixtures offers high performance in extremely compact dimensions. Its highly innovative dissipative system and off-axis inclination offer a 45° orientation of the full beam out from the ceiling, in a fixture of minimal yet sophisticated design.

La gamme d'encastables orientables trimless Milo offre des prestations élevées dans des dimensions extrêmement compactes. L'étude d'un système de dissipation extrêmement innovant, unie à l'inclinaison hors de l'axe de l'appareil, permet une orientabilité de 45° qui maintient tout le flux lumineux hors du niveau du plafond, dans un appareil au design minimaliste et sophistiqué.


La gama de empotrados orientables trimless Milo ofrece altas prestaciones en tamaños sumamente compactos. El estudio de un sistema de disipación sumamente innovador, junto con la inclinación fuera del eje del aparato, permite una orientación de 45° que mantiene todo el flujo luminoso fuera del ras del techo, en un aparato de diseño minimalista y sofisticado.

IP20 Class 2  JA8 made in Canada


Supply current	Power	Series wiring
Courant d'alimentation	Pouissance	Câblage en série
Corriente de alimentación	Potencia	Cableado en serie
Static White: 500mA (V ₂ x18V)	Static White: 2x9W	
Dim To Warm: 400mA (V ₂ x18V)	Dim To Warm: 2x7,2W	
Tunable White: 500mA (V ₂ x18V)	Tunable White: 2x9W	

LED selection	CRI	Lumens
Sélection des LED	98	2400K — 1456 lm
Selección del LED		2700K — 2128 lm
2-Step MacAdam		3000K — 2232 lm
		3500K — 2260 lm
		4000K — 2228 lm
		DW — 1260 lm
		TW — 1656 lm

Dimensions
Dimensiones

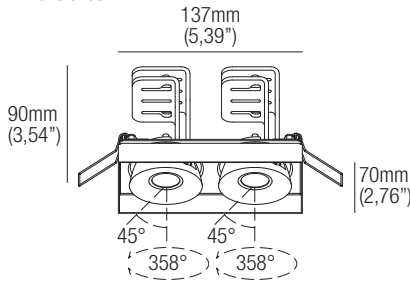


Photometric diagrams
Diagrammes photométriques
Diagramas fotométricos

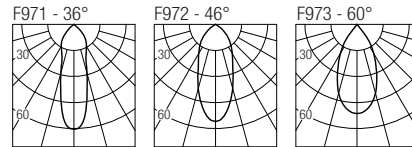

Code construction

Construction du code produit
Construcción del código de producto

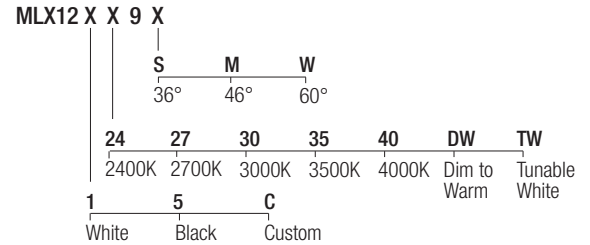


Accessories

Accessoires
Accesorios

AT086X02144

Airtight recessed housing for insulated ceiling



IC086X02144

Recessed housing for insulated ceiling


MP-X144

Baseplate




X02144

T-bar baseplate



MLX12Q White

Plasterboard recessing frame




MLX12Q.BMK-WH White

MLX12Q.BMK-BLK Black

MLX12Q.BMK-CU Custom

Backmount frame for hard surfaces



2xLH01

Low luminance hex louvre 

Static White 500mA drivers

Static White Alimentateurs 500mA
Static White Alimentadores 500mA

(2x) CCPR010A-500 (1) IP20

Dimming: PHASE - 0-10V

CCPR040A-500 (1) IP20

Dimming: PHASE - 0-10V

Dim to Warm 400mA drivers

Dim to Warm Alimentateurs 400mA
Dim to Warm Alimentadores 400mA

(2x) CCPR010A-400 (1) IP20

Dimming: PHASE - 0-10V

CCPR040A-400 (1) IP20

Dimming: PHASE - 0-10V

Tunable White 500mA drivers

Tunable White Alimentateurs 500mA
Tunable White Alimentadores 500mA

DL0561S1 (1) IP20

Dimming: 0-10V