

**MOON Q10**  
Trimless downlight


IP20 Class 2  JA8 made in Canada

design Lapo Grassellini

The Moon range of trimless, recessed fixtures matches utmost performance to incredible compactness. Recessed optics ensure high visual comfort. Revolutionary in dissipative, functional design, it offers the possibility to combine colour temperatures and beam angles in CRI85 and CRI93 versions.

La gamme d'encastrables trimless Moon associe prestations très élevées et dimension incroyablement contenue. L'optique en retrait garantit un confort visuel élevé. Révolutionnaires pour le design fonctionnel à la dissipation, ils offrent la possibilité d'associer températures, couleur et ouvertures de faisceau dans les versions à CRI85 et à CRI93.

La gama de luminarias empotrables trimless Moon combina un rendimiento muy alto con un tamaño increíblemente pequeño. La óptica hacia atrás garantiza un alto confort visual. Revolucionarios por su diseño funcional para la disipación, ofrecen la posibilidad de combinar temperaturas de color y aperturas de haz en las versiones CRI85 y CRI93.

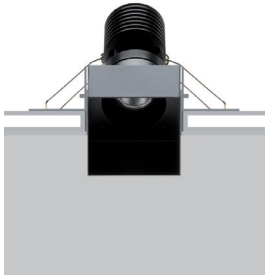

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
Static White: 500mA (V<sub>i</sub>18V)  
Dim To Warm: 400mA (V<sub>i</sub>18V)  
Tunable White: 500mA (V<sub>i</sub>18V)

**Power**  
Puissance  
Potencia  
Static White: 9W  
Dim To Warm: 7,2W  
Tunable White: 9W


**Series wiring**  
Câblage en série  
Cableado en serie

**LED selection**  
Sélection des LED  
Selección del LED  
2-Step MacAdam


**CRI**  
98

**Lumens**  
2400K — 728 lm  
2700K — 1064 lm  
3000K — 1116 lm  
3500K — 1130 lm  
4000K — 1114 lm  
DW — 630 lm  
TW — 828 lm

**Dimensions**  
Dimensiones

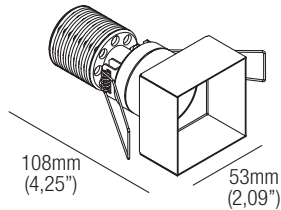

**Photometric diagrams**  
Diagrammes photométriques  
Diagramas fotométricos

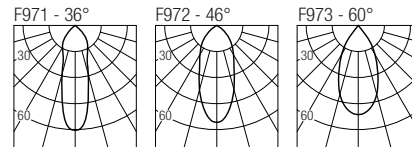

**Code construction**

Construction du code produit  
Construcción del código de producto


MQ1		X	X	9	X						
		S	M	W							
		36°	46°	60°							
		24	27	30	35	40	DW	TW			
		2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White			
1		5	C								
White		Black	Custom								

**Accessories**

Accessoires  
Accesorios

**AT086Q02058**

Airtight recessed housing for insulated ceiling




**IC086Q02058**

Recessed housing for insulated ceiling


**MP-Q058**

Baseplate



**Q02058**

T-bar baseplate



**MQC002** White


Plasterboard recessing frame

**MQC002.BMK-WH** White

**MQC002.BMK-BLK** Black

**MQC002.BMK-CU** Custom

Backmount frame for hard surfaces



**LOH2** (White) - **LOH2B** (Black)

Low luminance hex louvre



**Static White 500mA drivers**

Static White Alimentateurs 500mA  
Static White Alimentadores 500mA

**CCPRO10A-500** (1) IP20

Dimming: PHASE - 0-10V

**CCPRO40A-500** (1..3) IP20

Dimming: PHASE - 0-10V

**Dim to Warm 400mA drivers**

Dim to Warm Alimentateurs 400mA  
Dim to Warm Alimentadores 400mA

**CCPRO10A-400** (1) IP20

Dimming: PHASE - 0-10V

**CCPRO40A-400** (1..3) IP20

Dimming: PHASE - 0-10V

**Tunable White 500mA drivers**

Tunable White Alimentateurs 500mA  
Tunable White Alimentadores 500mA

**DL0561S1** (1..3) IP20

Dimming: 0-10V