

MOON QX130
Trimless downlight

IP20 Class 2  JA8 made in Canada

design Lapo Grassellini

The Moon range of trimless, recessed fixtures matches utmost performance to incredible compactness. Recessed optics ensure high visual comfort. Revolutionary in dissipative, functional design, it offers the possibility to combine colour temperatures and beam angles in CRI85 and CRI93 versions.

La gamme d'encastrables trimless Moon associe prestations très élevées et dimension incroyablement contenue. L'optique en retrait garantit un confort visuel élevé. Révolutionnaires pour le design fonctionnel à la dissipation, ils offrent la possibilité d'associer températures, couleur et ouvertures de faisceau dans les versions à CRI85 et à CRI93.


La gama de luminarias empotrables trimless Moon combina un rendimiento muy alto con un tamaño increíblemente pequeño. La óptica hacia atrás garantiza un alto confort visual. Revolucionarios por su diseño funcional para la disipación, ofrecen la posibilidad de combinar temperaturas de color y aperturas de haz en las versiones CRI85 y CRI93.




Supply current	Power	Series wiring
Courant d'alimentation	Pouissance	Câblage en série
Corriente de alimentación	Potencia	Cableado en serie
Static White: 500mA (V,3x18V)	Static White: 3x9W	
Dim To Warm: 400mA (V,3x18V)	Dim To Warm: 3x7,2W	
Tunable White: 500mA (V,3x18V)	Tunable White: 3x9W	

LED selection	CRI	Lumens
Sélection des LED	98	2400K — 2184 lm
Selección del LED		2700K — 3192 lm
2-Step MacAdam		3000K — 3348 lm
		3500K — 3393 lm
		4000K — 3342 lm
		DW — 1890 lm
		TW — 2484 lm

Dimensions
Dimensiones

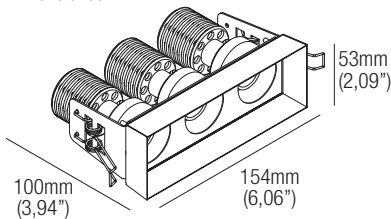

Photometric diagrams
Diagrammes photométriques
Diagramas fotométricos

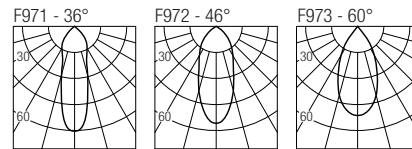

Code construction

Construction du code produit
Construcción del código de producto

MQX13 X X 9 X


	S	M	W				
	36°	46°	60°				
24	27	30	35	40	DW	TW	
2400K	2700K	3000K	3500K	4000K	Dim to Warm	Tunable White	
1	5	C					
White	Black	Custom					

Accessories

Accessoires
Accesorios

AT127X03161

Airtight recessed housing for insulated ceiling



IC127X03161

Recessed housing for insulated ceiling


MP-X161

Baseplate




X03161

T-bar baseplate



MQX13Q White

Plasterboard recessing frame




MQX13Q.BMK-WH White

MQX13Q.BMK-BLK Black

MQX13Q.BMK-CU Custom

Backmount frame for hard surfaces



3xLOH2 (White) - 3xLOH2B (Black)

Low luminance hex louvre



Static White 500mA drivers

Static White Alimentateurs 500mA
Static White Alimentadores 500mA

(3x) CCPR010A-500 (1) IP20

Dimming: PHASE - 0-10V

CCPR040A-500 (1) IP20

Dimming: PHASE - 0-10V

Dim to Warm 400mA drivers

Dim to Warm Alimentateurs 400mA
Dim to Warm Alimentadores 400mA

(3x) CCPR010A-400 (1) IP20

Dimming: PHASE - 0-10V

CCPR040A-400 (1) IP20

Dimming: PHASE - 0-10V

Tunable White 500mA drivers

Tunable White Alimentateurs 500mA
Tunable White Alimentadores 500mA

DL0561S1 (1) IP20

Dimming: 0-10V