

SELENE


Flush optic downlight

design Roberto Mantovani

Selene recessed wall and ceiling fixtures are distinguished by their compact size, a wide range of finishes, high optical and build quality and round and square forms. With three beam angles, Selene is ideal for applications ranging from spotlighting to the accenting of display elements and architectural details.

Des dimensions réduites et une vaste gamme de finitions caractérisent les encastrables au mur et au plafond Selene, des appareils de très haute qualité constructive et optique disponibles dans les formes ronde et carrée. Avec trois ouvertures de faisceau, Selene se prête à des applications qui vont de l'éclairage de marche à l'éclairage de mise en valeur d'éléments d'exposition ou de détails architectoniques.

Tamaño reducido y un amplio surtido de acabados caracterizan los productos empotrados de pared y techo Selene, aparatos de alta calidad constructiva y óptica, disponibles en formas redondas y cuadradas. Con tres aberturas de haz, Selene es ideal para aplicaciones que van desde balizas a la iluminación puntual para resaltar elementos de exposiciones o detalles arquitectónicos.



IP20

Class 2



made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
500mA (V_i 2,9V)

Power

Puissance
Potencia
1,5W

Series wiring

Câblage en série
Cableado en serie

LED selection

Sélection des LED
Selección del LED
3-Step MacAdam

CRI


90

Lumens

500mA
2700K — 128 lm
3000K — 133 lm
3500K — 146 lm
4000K — 154 lm

Dimensions


Dimensiones



Photometric diagrams

Diagrammes photométriques

Diagramas fotométricos

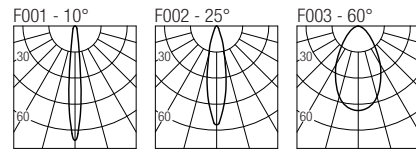

Code construction

Construction du code produit

Construcción del código de producto

SP	X	X	X	X
	27	30	35	40
	2700K	3000K	3500K	4000K
	0	1	2	
	10°	25°	60°	
	1	5	C	
	White	Black	Custom	
	1	2		
	Round	Square		


Accessories

Accessoires

Accesorios

AT064R01030

Airtight recessed housing for insulated ceiling



IC064R01030

Recessed housing for insulated ceiling


MP-R030

Baseplate



R01030

T-bar baseplate



500mA drivers

Alimentateurs 500mA

Alimentadores 500mA

CCPRO10A-500 (1..6) IP20

Dimming: PHASE - 0-10V

CCPRO40A-500 (1..18) IP20

Dimming: PHASE - 0-10V