

SEXUS 6 UGR
Trimless downlight

design Rod&Todd

A small and shallow trimless adjustable downlight with recessed optic characterized by a minimal design and high optical performance. Equipped with Fidelity LED, with CRI98 and R9 93, it lends itself to applications ranging from accent to general lighting. Thanks to the use of highly-advanced optics, it offers narrow and precise light beams. Can be fitted with an anti-glare filter for maximum visual comfort.

Encastrable réglable trimless à plafond avec optique en retraite petit et peu profond, caractérisé par un design minimal et des performances optiques élevées. Équipé de LED Fidelity, avec CRI98 et R9 93, il se prête à des applications allant de l'accentuation à l'éclairage général. Grâce à l'utilisation d'optiques avancées, il offre des faisceaux lumineux étroits et précis. Peut être équipé d'un filtre anti-éblouissement pour un confort visuel maximal.

Un downlight orientable sin marco con óptica empotrable pequeño y poco profundo que se caracteriza por un diseño minimalista y un alto rendimiento óptico. Equipado con Fidelity LED, con CRI98 y R9 93, se presta a aplicaciones que van desde la iluminación de acento hasta la iluminación general. Gracias al uso de ópticas muy avanzadas, ofrece haces de luz estrechos y precisos. Se puede equipar con un filtro antideslumbramiento para un máximo confort visual.




IP20 Class 2  JA8 made in Canada

Supply current	Power	Series wiring
Courant d'alimentation	Pouissance	Câblage en série
Corriente de alimentación	Potencia	Cableado en serie
Static White: 500mA (V,9V)	Static White: 4,5W	
Dim To Warm: 250mA (V,18V)	Dim To Warm: 4,5W	

LED selection	CRI	Lumens
Sélection des LED	98	2400K <u>434</u> lm
Selección del LED		2700K <u>553</u> lm
2-Step MacAdam		3000K <u>579</u> lm
		3500K <u>586</u> lm
		4000K <u>579</u> lm
		DW <u>383</u> lm

Dimensions


Dimensiones



Photometric diagrams

Diagrammes photométriques

Diagramas fotométricos

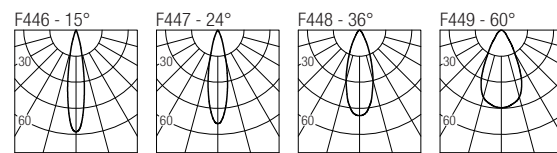

Code construction

Construction du code produit

Construcción del código de producto

SXU6 X X X

N	S	M	W	DW
15°	24°	36°	60°	
24	27	30	35	40
2400K	2700K	3000K	3500K	4000K
1	5	C		
White	Black	Custom		


Accessories

Accessoires

Accessorios

AT064R01065

Airtight recessed housing for insulated ceiling



IC064R01065

Recessed housing for insulated ceiling


MP-R065

Baseplate



R01065

T-bar baseplate



ZQSU001 White

Plasterboard recessing frame




ZQSU001.BMK-WH White

ZQSU001.BMK-BLK Black

ZQSU001.BMK-CU Custom

Backmount frame for hard surfaces



LH03

Low luminance hex louvre 

Static White 500mA drivers

Static White Alimentateurs 500mA

Static White Alimentadores 500mA

CCPRO10A-500 (1..2) IP20

Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20

Dimming: PHASE - 0-10V

Dim to Warm 250mA drivers

Dim to Warm Alimentateurs 250mA

Dim to Warm Alimentadores 250mA

CCPRO10A-250-DW (1..2) IP20

Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20

Dimming: PHASE - 0-10V