

SLOT 10
IP-rated downlight

design Roberto Mantovani



IP67 recessed luminaires of the utmost build quality, the extremely small dimensions are paired with a high luminous flux. With a body in thick anodised aluminium, it comes in versions with the front in AISI316L stainless steel and in anodised and powder-coated aluminium. Extra-clear tempered glass, ATEX cable gland and neoprene cable. Available in a range of colour temperatures and beam apertures.

Encastrables IP67 de très haute qualité constructive, de dimensions extrêmement limitées et à flux lumineux élevés. Corps en aluminium anodisé épais, versions avec façade en acier INOX AISI316L et en aluminium anodisé et revêtu de peinture en poudre. Verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène. Disponible en différentes températures de couleur et angles de faisceau. Peut être équipé de filtre anti-éblouissement pour le plus grand confort visuel.

Luminarias empotrables IP67 de muy alta calidad de fabricación, con tamaño extremadamente reducido y elevados flujos luminosos. Cuerpo de aluminio anodizado con espesor, versiones con frente de acero inoxidable INOX AISI316L y de aluminio anodizado y barnizado con polvo. Vidrio templado extra claro, prensaestopas ATEX, cable de neoprene. Disponibles en diferentes temperaturas, color y aperturas de haz.



IP67 Class 2



made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
Static White: 500mA (V_i18V)
Dim To Warm: 400mA (V_i18V)

Power

Pouissance
Potencia
Static White: 9W
Dim To Warm: 7,2W

Series wiring

Câblage en série
Cableado en serie

LED selection

Sélection des LED
Selección del LED
2-Step MacAdam

CRI


98

Lumens

2400K — **728 lm**
2700K — **1064 lm**
3000K — **1116 lm**
3500K — **1130 lm**
4000K — **1114 lm**
DW — **630 lm**

Dimensions


Dimensiones

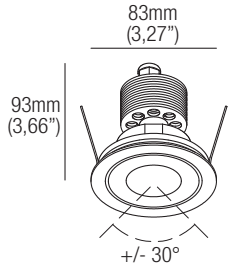

Photometric diagrams

Diagrammes photométriques

Diagramas fotométricos

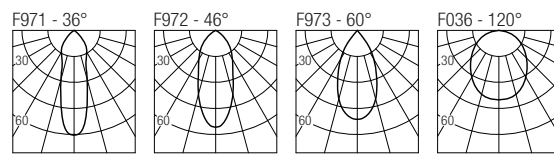

Code construction

Construction du code produit

Construcción del código de producto

SL1 X X 9 X					
	S	M	W	X	
	36°	46°	60°	120°	
	24	27	30	35	40
	2400K	2700K	3000K	3500K	4000K
	DW				
	Dim to Warm				
B	N	Z	C		
White	Black	INOX	Custom		
		AISI 316L			

Accessories

Accessoires


Accesorios

AT086R02075

Airtight recessed housing for insulated ceiling

IC086R02075

Recessed housing for insulated ceiling




MP-R075

Baseplate



R02075

T-bar baseplate



CSSL01

Recessing box



LOD1

Low luminance hex louvre 

Static White 500mA drivers

Static White Alimentateurs 500mA

Static White Alimentadores 500mA

CCPRO10A-500 (1) IP20

Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20

Dimming: PHASE - 0-10V

Dim to Warm 400mA drivers

Dim to Warm Alimentateurs 400mA

Dim to Warm Alimentadores 400mA

CCPRO10A-400 (1) IP20

Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20

Dimming: PHASE - 0-10V