


SLOT 6
IP-rated downlight

design Roberto Mantovani

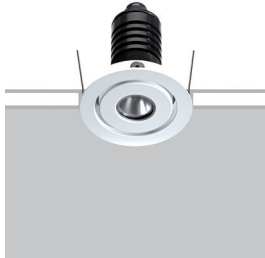

IP67 recessed luminaires of the utmost build quality, the extremely small dimensions are paired with a high luminous flux. With a body in thick anodised aluminium, it comes in versions with the front in AISI316L stainless steel and in anodised and powder-coated aluminium. Extra-clear tempered glass, ATEX cable gland and neoprene cable. Available in a range of colour temperatures and beam apertures.

Encastrables IP67 de très haute qualité constructive, de dimensions extrêmement limitées et à flux lumineux élevés. Corps en aluminium anodisé épais, versions avec façade en acier INOX AISI316L et en aluminium anodisé et revêtu de peinture en poudre. Verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène. Disponible en différentes températures de couleur et angles de faisceau. Peut être équipé de filtre anti-éblouissement pour le plus grand confort visuel.

Luminarias empotrables IP67 de muy alta calidad de fabricación, con tamaño extremadamente reducido y elevados flujos luminosos. Cuerpo de aluminio anodizado con espesor, versiones con frente de acero inoxidable INOX AISI316L y de aluminio anodizado y barnizado con polvo. Vidrio templado extra claro, prensaestopas ATEX, cable de neoprene. Disponibles en diferentes temperaturas, color y aperturas de haz.



IP67 Class 2



made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
Static White: 500mA (V,9V)
Dim To Warm: 250mA (V,18V)

Power

Pouissance
Potencia
Static White: 4,5W
Dim To Warm: 4,5W

Series wiring

Câblage en série
Cableado en serie

LED selection

Sélection des LED
Selección del LED
2-Step MacAdam

CRI


98

Lumens

2400K — 406 lm
2700K — 517 lm
3000K — 541 lm
3500K — 548 lm
4000K — 541 lm
DW — 358 lm

Dimensions


Dimensiones

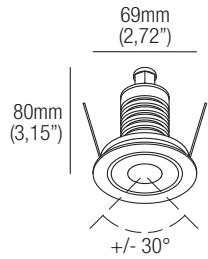

Photometric diagrams

Diagrammes photométriques

Diagramas fotométricos

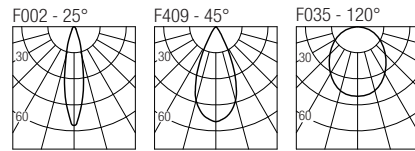


Code construction

Construction du code produit

Construcción del código de producto

SL6 X X X E

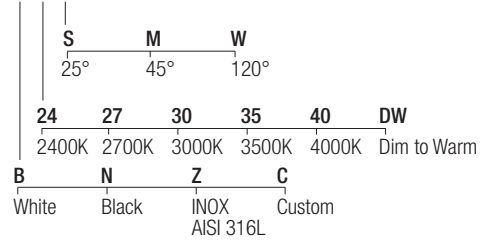


Accessories

Accessoires

Accesorios

AT064R01051

Airtight recessed housing for insulated ceiling



IC064R01051

Recessed housing for insulated ceiling


MP-R051

Baseplate




R01051

T-bar baseplate



CSDS10

Recessing box



LH03

Low luminance hex louvre

Static White 500mA drivers

Static White Alimentateurs 500mA

Static White Alimentadores 500mA

CCPRO10A-500 (1..2) IP20

Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20

Dimming: PHASE - 0-10V

Dim to Warm 250mA drivers

Dim to Warm Alimentateurs 250mA

Dim to Warm Alimentadores 250mA

CCPRO10A-250-DW (1..2) IP20

Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20

Dimming: PHASE - 0-10V