


**TEDDY T6**  
Trimless projector

design Jude Allen

An adjustable projector designed for trimless installations, featuring a minimalist design and superior optical performance. Ideal for both accent and general lighting applications. The Teddy range has field changeable optics and can hold up to two media accessories, including anti-glare filter and a customizable color corrective gel.

Projecteur réglable conçu pour les installations sans garniture, doté d'un design minimaliste et de performances optiques supérieures. Idéal pour les applications d'éclairage d'accentuation et d'éclairage général. La gamme Teddy possède des optiques modifiables sur le terrain et peut contenir jusqu'à deux accessoires, y compris un filtre anti-éblouissement et un gel correcteur de couleur personnalisable.

Proyector orientable diseñado para instalaciones sin marco, con un diseño minimalista y un rendimiento óptico superior. Ideal tanto para aplicaciones de acento como de iluminación general. La gama Teddy tiene ópticas que se pueden cambiar sobre el terreno y puede alojar hasta dos accesorios multimedia, incluido un filtro antideslumbrante y un gel corrector del color personalizable.




IP20 Class 2  made in Canada

<b>Supply current</b>	<b>Power</b>	<b>Series wiring</b>
Courant d'alimentation	Pouissance	Câblage en série
Corriente de alimentación	Potencia	Cableado en serie
Static White: 500mA (V,9V)	Static White: 4,5W	
Dim To Warm: 250mA (V,18V)	Dim To Warm: 4,5W	

<b>LED selection</b>	<b>CRI</b>	<b>Lumens</b>
Sélection des LED	98	2400K — 434 lm
Selección del LED		2700K — 553 lm
2-Step MacAdam		3000K — 579 lm
		3500K — 586 lm
		4000K — 579 lm
		DW — 383 lm


**Dimensions**

Dimensions

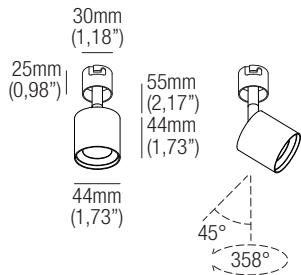

**Photometric diagrams**

Diagrammes photométriques  
Diagramas fotométricos

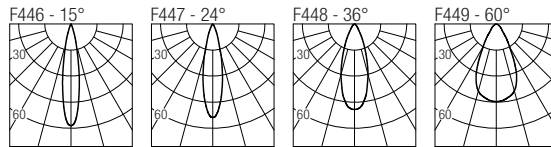

**Code construction**

Construction du code produit  
Construcción del código de producto

**TYT6 X X X**


	24	27	30	35	40	DW
	2400K	2700K	3000K	3500K	4000K	Dim to Warm
1	2	3	4			
15°	24°	36°	60°			
1	5	C				
White	Black	Custom				

**Accessories**

Accessoires  
Accesorios

**AT064R01045**

Airtight recessed housing for insulated ceiling



**IC064R01045**

Recessed housing for insulated ceiling


**MP-R045**

Baseplate



**R01045**

T-bar baseplate



**ZQC001 White**

Plasterboard recessing frame



**ZQC001.BMK-WH White**

**ZQC001.BMK-BLK Black**

**ZQC001.BMK-CU Custom**

Backmount frame for hard surfaces



**LH03**

Low luminance hex louvre 

**GEL35**


Colour corrective poly gel, consult with factory 

**OPT3515 15°**

**OPT3524 24°**

**OPT3536 36°**

**OPT3560 60°**

Field changeable optic 

**Static White 500mA drivers**

Static White Alimentateurs 500mA  
Static White Alimentadores 500mA

**CCPRO10A-500 (1..2) IP20**

Dimming: PHASE - 0-10V

**CCPRO40A-500 (1..6) IP20**

Dimming: PHASE - 0-10V

**Dim to Warm 250mA drivers**

Dim to Warm Alimentateurs 250mA  
Dim to Warm Alimentadores 250mA

**CCPRO10A-250-DW (1..2) IP20**

Dimming: PHASE - 0-10V

**CCPRO40A-250-DW (1..3) IP20**

Dimming: PHASE - 0-10V