


**TYRONE 10**  
IP-rated downlight

design Roberto Mantovani

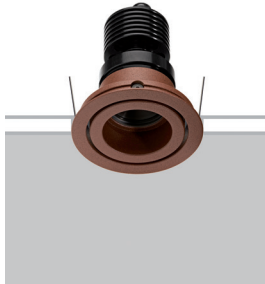

IP67 recessed luminaires that offer the highest build quality, with extremely small dimensions, elevated luminous fluxes and embedded optics for high visual comfort. The body and front are of thick anodised aluminium, with powder coating on the face. Extra-clear tempered glass, ATEX cable gland and neoprene cable. Available in a range of colour temperatures and beam apertures.

Encastrables IP67 de très haute qualité constructive, de dimensions extrêmement limitées et à flux lumineux élevés avec optiques encastrées pour un grand confort visuel. Corps en aluminium anodisé épais, façade en aluminium anodisé et revêtu de peinture en poudre. Verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène. Disponible en différentes températures de couleur et angles de faisceau. Peut être équipé de filtre anti-éblouissement pour le plus grand confort visuel.

Luminarias empotrables IP67 de muy alta calidad de fabricación, con tamaño extremadamente reducido, elevados flujos luminosos y ópticas hacia atrás garantiza un alto confort visual. Cuerpo de aluminio anodizado con espesor, con frente de aluminio anodizado y barnizado con polvo. Vidrio templado extra claro, prensaestopas ATEX, cable de neoprene. Disponibles en diferentes temperaturas, color y aperturas de haz. Se puede equipar con un filtro antideslumbrante para un máximo confort visual.



IP67

Class 2



made in Canada

**Supply current**

Courant d'alimentation  
Corriente de alimentación  
Static White: 500mA (V<sub>i</sub>18V)  
Dim To Warm: 400mA (V<sub>i</sub>18V)

**Power**

Pouissance  
Potencia  
Static White: 9W  
Dim To Warm: 7,2W

**Series wiring**

Câblage en série  
Cableado en serie

**LED selection**

Sélection des LED  
Selección del LED  
2-Step MacAdam

**CRI**


98

**Lumens**

2400K — 728 lm  
2700K — 1064 lm  
3000K — 1116 lm  
3500K — 1130 lm  
4000K — 1114 lm  
DW — 630 lm

**Dimensions**


Dimensiones



**Photometric diagrams**

Diagrammes photométriques

Diagramas fotométricos

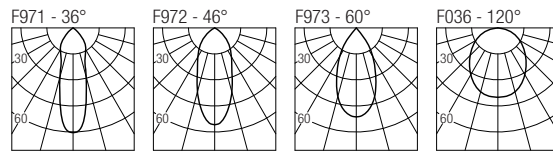

**Code construction**

Construction du code produit

Construcción del código de producto

TR1 X X 9 X

	S	M	W	X	
	36°	46°	60°	120°	
	24	27	30	35	40
	2400K	2700K	3000K	3500K	4000K
					DW
					Dim to Warm
B	N	Z	C		
White	Black	INOX	Custom		
			AISI 316L		

**Accessories**

Accessoires


Accessorios

**AT086R02075**

Airtight recessed housing for insulated ceiling


**IC086R02075**

Recessed housing for insulated ceiling




**MP-R075**

Baseplate



**R02075**

T-bar baseplate



**CSSL01**

Recessing box



**LOD1**

Low luminance hex louvre



**Static White 500mA drivers**

Static White Alimentateurs 500mA

Static White Alimentadores 500mA

**CCPRO10A-500 (1) IP20**

Dimming: PHASE - 0-10V

**CCPRO40A-500 (1..3) IP20**

Dimming: PHASE - 0-10V

**Dim to Warm 400mA drivers**

Dim to Warm Alimentateurs 400mA

Dim to Warm Alimentadores 400mA

**CCPRO10A-400 (1) IP20**

Dimming: PHASE - 0-10V

**CCPRO40A-400 (1..3) IP20**

Dimming: PHASE - 0-10V