

TYRONE 6
IP-rated downlight

design Roberto Mantovani



IP67 recessed luminaires that offer the highest build quality, with extremely small dimensions, elevated luminous fluxes and embedded optics for high visual comfort. The body and front are of thick anodised aluminium, with powder coating on the face. Extra-clear tempered glass, ATEX cable gland and neoprene cable. Available in a range of colour temperatures and beam apertures.

Encastrables IP67 de très haute qualité constructive, de dimensions extrêmement limitées et à flux lumineux élevés avec optiques encastrées pour un grand confort visuel. Corps en aluminium anodisé épais, façade en aluminium anodisé et revêtu de peinture en poudre. Verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène. Disponible en différentes températures de couleur et angles de faisceau. Peut être équipé de filtre anti-éblouissement pour le plus grand confort visuel.

Luminarias empotrables IP67 de muy alta calidad de fabricación, con tamaño extremadamente reducido, elevados flujos luminosos y ópticas hacia atrás garantiza un alto confort visual. Cuerpo de aluminio anodizado con espesor, con frente de aluminio anodizado y barnizado con polvo. Vidrio templado extra claro, prensaestopas ATEX, cable de neoprene. Disponibles en diferentes temperaturas, color y aperturas de haz. Se puede equipar con un filtro antideslumbrante para un máximo confort visual.



IP67 Class 2



made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
Static White: 500mA (V,9V)
Dim To Warm: 250mA (V, 18V)

Power

Pouissance
Potencia
Static White: 4,5W
Dim To Warm: 4,5W

Series wiring

Câblage en série
Cableado en serie

LED selection

Sélection des LED
Selección del LED
2-Step MacAdam

CRI


98

Lumens

2400K **406 lm**
2700K **517 lm**
3000K **541 lm**
3500K **548 lm**
4000K **541 lm**
DW **358 lm**

Dimensions


Dimensiones

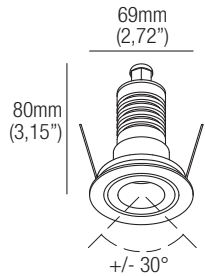

Photometric diagrams

Diagrammes photométriques

Diagramas fotométricos

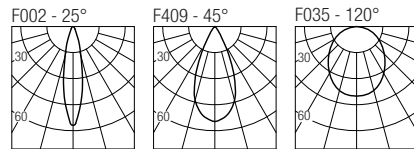


Code construction

Construction du code produit

Construcción del código de producto

TR6 X X X E

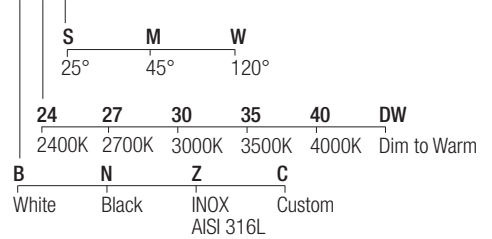

Accessories

Accessoires


Accesorios

AT086R02060

Airtight recessed housing for insulated ceiling

IC086R02060

Recessed housing for insulated ceiling




MP-R060

Baseplate




R02060

T-bar baseplate



CSXJ01

Recessing box



LOH1

Low luminance hex louvre

Static White 500mA drivers

Static White Alimentateurs 500mA

Static White Alimentadores 500mA

CCPR010A-500 (1..2) IP20

Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20

Dimming: PHASE - 0-10V

Dim to Warm 250mA drivers

Dim to Warm Alimentateurs 250mA

Dim to Warm Alimentadores 250mA

CCPR010A-250-DW (1..2) IP20

Dimming: PHASE - 0-10V

CCPR040A-250-DW (1..3) IP20

Dimming: PHASE - 0-10V