

TYTUS
IP-rated downlight

design Roberto Mantovani

IP67 recessed fixtures of the highest quality construction with extremely compact dimensions in which the rearview optics guarantee a high visual comfort. Body in anodized aluminium, versions with the front mask in anodised aluminium and powder-coated. Toughened extra-clear glass, ATEX cable gland, neoprene cord. Recessed optics ensure high visual comfort.

Encastrables IP67 de très haute qualité constructive avec des dimensions extrêmement contenues où l'optique en retrait garantit un confort visuel élevé. Corps en aluminium anodisé à épaisseur, versions avec frontal en aluminium anodisé et peint en poudre. Verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène. L'optique en retrait garantit un confort visuel élevé.

Luminarias empotrables IP67 de muy alta calidad de fabricación con tamaño extremadamente reducido, en donde la óptica hacia atrás garantiza un alto confort visual. Cuerpo de aluminio anodizado con espesor, versiones con frente de aluminio anodizado y barnizado con polvo. Vidrio templado extra claro, prensaestopas ATEX, cable de neoprene. La óptica hacia atrás garantiza un alto confort visual.



IP67 Class 2



made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
350mA (V, 2,9V)

Power

Pouissance
Potencia
1W

Series wiring

Câblage en série
Cableado en serie

LED selection

Sélection des LED
Selección del LED
3-Step MacAdam

CRI


90

Lumens

2700K — 81 lm
3000K — 81 lm
3500K — 100 lm
4000K — 107 lm

Dimensions


Dimensiones



Photometric diagrams

Diagrammes photométriques

Diagramas fotométricos

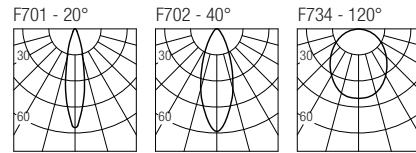

Code construction

Construction du code produit

Construcción del código de producto

TYU X X X

	B	N	C	
	White	Black	Custom	
	27	30	35	40
	2700K	3000K	3500K	4000K
1	2	9		
20°	40°	120°		

Accessories

Accessoires


Accesorios

AT064R01025

Airtight recessed housing for insulated ceiling

IC064R01025

Recessed housing for insulated ceiling




MP-R025

Baseplate



R01025

T-bar baseplate



350mA drivers

Alimentateurs 350mA

Alimentadores 350mA

CCPR010A-350 (1..9) IP20

Dimming: PHASE - 0-10V

CCPR040A-350 (1..18) IP20

Dimming: PHASE - 0-10V