


TYZAN

IP-rated downlight

design Roberto Mantovani

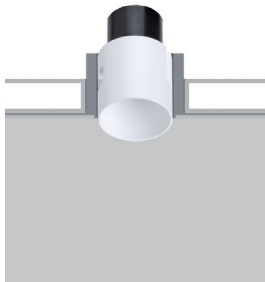

IP67 trimless recessed fixtures of the highest quality construction with extremely compact dimensions. Body in anodized aluminium, versions with the front mask in anodised aluminium and powder-coated. Toughened extra-clear glass, ATEX cable gland, neoprene cord. Recessed optics ensure high visual comfort.

Encastrables trimless IP67 de très haute qualité constructive, avec des dimensions extrêmement contenues. Corps en aluminium anodisé à épaisseur, versions avec frontal en aluminium anodisé et peint en poudre. Verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène. L'optique en retrait garantit un confort visuel élevé.

Luminarias empotrables trimless IP67 de muy alta calidad de fabricación con tamaño extremadamente reducido. Cuerpo de aluminio anodizado con espesor, versiones con frente de aluminio anodizado y barnizado con polvo. Vidrio templado extra claro, prensaestopas ATEX, cable de neoprene. La óptica hacia atrás garantiza un alto confort visual.

IP67 Class 2  made in Canada

Supply current
Courant d'alimentation
Corriente de alimentación
350mA (V_i 2,9V)

Power
Puissance
Potencia
1W


Series wiring
Câblage en série
Cableado en serie

LED selection
Sélection des LED
Selección del LED
3-Step MacAdam


CRI
90

Lumens
2700K — 81 lm
3000K — 81 lm
3500K — 100 lm
4000K — 107 lm

Dimensions
Dimensiones



Photometric diagrams
Diagrammes photométriques
Diagramas fotométricos

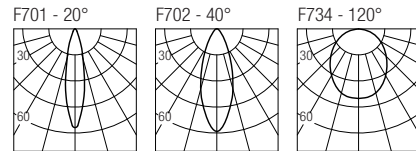

Code construction
Construction du code produit
Construcción del código de producto


| | | | |
|----------|-------|-------|-------------|
| TZ X X X | | | |
| | B | N | C |
| | White | Black | Custom |
| | 27 | 30 | 35 40 |
| | 2700K | 3000K | 3500K 4000K |
| 1 | 2 | 9 | |
| 20° | 40° | 120° | |

Accessories

Accessoires
Accesorios

AT064R01045

Airtight recessed housing for insulated ceiling



IC064R01045

Recessed housing for insulated ceiling


MP-R045

Baseplate




R01045

T-bar baseplate



ZQC001 White

Plasterboard recessing frame




ZQC001.BMK-WH White

ZQC001.BMK-BLK Black

ZQC001.BMK-CU Custom

Backmount frame for hard surfaces



350mA drivers

Alimentateurs 350mA
Alimentadores 350mA

CCPRO10A-350 (1..9) IP20

Dimming: PHASE - 0-10V

CCPRO40A-350 (1..18) IP20

Dimming: PHASE - 0-10V