FLEXA
LIGHTING
NORTH AMERICA

WAND X1020

Projector for 24V tracks

IP20 made in Canada

design Jude Allen



An adjustable projector designed for low voltage track installations, featuring a minimalist design and superior optical performance. Ideal for both accent and general lighting applications. The Wand range has a wide variety of field changeable optics and can hold up to two media accessories, including anti-glare filter and a customizable color corrective gel.

Projecteur réglable conçu pour les installations sur rail à basse tension, doté d'un design minimaliste et de performances optiques supérieures. Idéal pour les applications d'éclairage d'accentuation et d'éclairage général. La gamme Wand dispose d'une grande variété d'optiques modifiables sur le terrain et peut contenir jusqu'à deux accessoires, y compris un filtre antireflet et un gel correcteur de couleur personnalisable.

Proyector orientable diseñado para instalaciones en carril de baja tensión, con un diseño minimalista y un rendimiento óptico superior. Ideal tanto para aplicaciones de acento como de iluminación general. La gama Wand cuenta con una amplia variedad de ópticas modificables en campo y puede alojar hasta dos accesorios multimedia, incluido un filtro antideslumbrante y un gel corrector del color personalizable.

Power
Pouissance
Potencia
9W
18W

LED selection
Sélection des LED
Selección del LED
2-Step MacAdam

CRI
98

Lumens

	9W	18W
2700K	**1137 lm**	**2165 lm**
3000K	**1196 lm**	**2279 lm**
3500K	**1311 lm**	**2498 lm**
4000K	**1272 lm**	**2423 lm**

Dimensions
Dimensiones

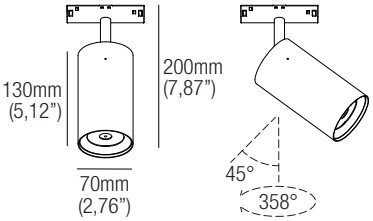

Code construction
Construction du code produit
Construcción del código de producto

WDX X X X X

Power: **9** 9W, **18** 18W

27 2700K, **30** 3000K, **35** 3500K, **40** 4000K

1 15° Soft, **2** 15° Tight, **3** 24°, **4** 36°, **5** 60°, **6** 20x55° Oval, **7** Wall Washer

1 White, **5** Black, **C** Custom

Photometric diagrams
Diagrammes photométriques
Diagramas fotométricos

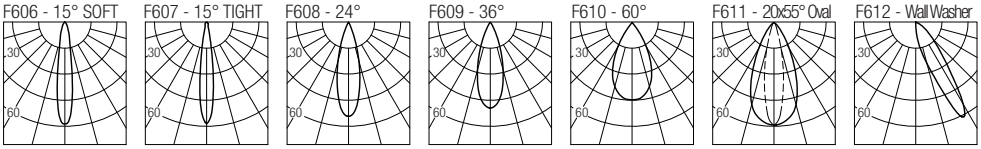

Accessories
Accessoires
Accessorios

LH06
Low luminance hex louvre

GEL50
Colour corrective poly gel, consult with factory

OPT5015S 15° Soft beam
OPT5015T 15° Tight beam
OPT5024 24°
OPT5036 36°
OPT5060 60°
OPT50O 20x55° Oval
OPT50WW Wall Washer

Field changeable optic

24VDC drivers
Alimentateurs 24VDC
Alimentadores 24VDC

CV2496A (9W 1..9, 18W 1..4) IP65
Dimming: PHASE - 0-10V

FLEXALIGHTING NORTH AMERICA Inc. Unit 22 - 15531 24th Avenue, Surrey, BC, Canada. V4A 2J4 ph. +1.604.385.4311 info@flexalighting-na.com