

WIM 6

Recessed optic downlight

design Jude Allen



The Wim range is a semi-recessed downlight characterized by a minimalist aesthetic. The visual ergonomics of the trim design create an accent on the ceiling plane that defines the presence of the luminaire with maximum visual comfort delivered from ultra-deep recessed optics. With best-in-class TIR optical systems in a variety of angles and cutting-edge LED technology, the Wim range is an adaptable general and accent lighting downlight.

La gamme Wim est un luminaire semi-encasté caractérisé par une esthétique minimaliste. L'ergonomie visuelle du design de la garniture crée un accent sur le plan du plafond qui définit la présence du luminaire avec un confort visuel maximal fourni par des optiques encastrées ultra-profondes. Avec les meilleurs systèmes optiques TIR de sa catégorie dans une variété d'angles et une technologie LED de pointe, la gamme Wim est un downlight adaptable pour l'éclairage général et d'accentuation.

La gama Wim es un downlight semiempotrable caracterizado por una estética minimalista. La ergonomía visual del diseño del embellecedor crea un acento en el plano del techo que define la presencia de la luminaria con el máximo confort visual que proporcionan las ópticas empotradas ultraprofundas. Con los mejores sistemas ópticos TIR de su clase en una variedad de ángulos y tecnología LED de vanguardia, la gama Wim es un downlight adaptable de iluminación general y de acento.



IP20 Class 2



JA8

made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
Static White: 500mA (V,9V)
Dim To Warm: 250mA (V,18V)

Power

Pouissance
Potencia
Static White: 4,5W
Dim To Warm: 4,5W

Series wiring

Câblage en série
Cableado en serie

LED selection

Sélection des LED
Selección del LED
2-Step MacAdam

CRI


98

Lumens

2400K	434 lm
2700K	553 lm
3000K	579 lm
3500K	586 lm
4000K	579 lm
DW	383 lm

Dimensions


Dimensiones



Photometric diagrams

Diagrammes photométriques

Diagramas fotométricos

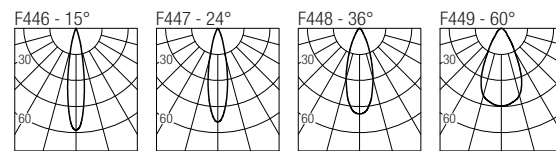

Code construction

Construction du code produit

Construcción del código de producto

WM6 X X X

	24	27	30	35	40	DW
	2400K	2700K	3000K	3500K	4000K	Dim to Warm
1	2	3	4			
	15°	24°	36°	60°		
1	5	C				
	White	Black	Custom			

Accessories

Accessoires


Accesorios

AT064R01045

Airtight recessed housing for insulated ceiling

IC064R01045

Recessed housing for insulated ceiling




MP-R045

Baseplate



R01045

T-bar baseplate



LH03

Low luminance hex louvre

Static White 500mA drivers

Static White Alimentateurs 500mA

Static White Alimentadores 500mA

CCPRO10A-500 (1..2) IP20

Dimming: PHASE - 0-10V

CCPRO40A-500 (1..6) IP20

Dimming: PHASE - 0-10V

Dim to Warm 250mA drivers

Dim to Warm Alimentateurs 250mA

Dim to Warm Alimentadores 250mA

CCPRO10A-250-DW (1..2) IP20

Dimming: PHASE - 0-10V

CCPRO40A-250-DW (1..3) IP20

Dimming: PHASE - 0-10V