


ZERO MOVE 2

Trimless downlight

design Roberto Mantovani

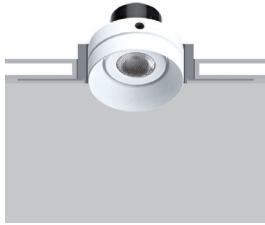

Trimless, orientable, recessed fixtures that combine extremely small dimensions with a remarkably simple and clean system for fastening to the formwork, with embedded optics for high visual comfort. Available in multiple beam apertures, they are suitable for applications ranging from highlighting exhibition components or architectural details to general lighting.

Spots trimless orientables qui combinent des dimensions extrêmement compactes avec un système de fixation au coffrage extrêmement simple et propre, avec des optiques encastrées pour un grand confort visuel. Disponibles dans une variété d'angles de faisceau, ils se prêtent aux applications allant de l'accentuation d'éléments d'affichage ou de détails architecturaux à l'éclairage général.

Luminarias empotrables trimless orientables que conjugan tamaño extremadamente reducido y un sistema de fijación al encofrado muy simple y sutil, con ópticas hacia atrás para un gran confort visual. Disponibles en múltiples aberturas de haz, se prestan a aplicaciones que van desde la acentuación de elementos de exposición o detalles arquitectónicos hasta la iluminación general.

IP20 Class 2  made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
500mA (V_i 2,9V)

Power

Puissance
Potencia
1,5W

Series wiring

Câblage en série
Cableado en serie

LED selection

Sélection des LED
Selección del LED
3-Step MacAdam

CRI


90

Lumens

500mA
2700K — 128 lm
3000K — 133 lm
3500K — 146 lm
4000K — 154 lm

Dimensions


Dimensiones

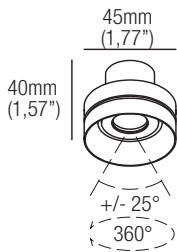

Photometric diagrams

Diagrammes photométriques

Diagramas fotométricos

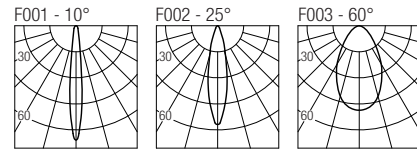

Code construction

Construction du code produit

Construcción del código de producto

ZSM	X	X	X
	27	30	35
	2700K	3000K	3500K
	40		
	4000K		
0	1	2	
10°	25°	60°	
1	5	C	
White	Black	Custom	


Accessories

Accessoires

Accesorios

AT064R01055

Airtight recessed housing for insulated ceiling



IC064R01055

Recessed housing for insulated ceiling


MP-R055

Baseplate



R01055

T-bar baseplate



ZQM001 White

Plasterboard recessing frame



500mA drivers

Alimentateurs 500mA

Alimentadores 500mA

CCPRO10A-500 (1..6) IP20

Dimming: PHASE - 0-10V

CCPRO40A-500 (1..18) IP20

Dimming: PHASE - 0-10V