


ZERO Q2
Trimless downlight

design Roberto Mantovani

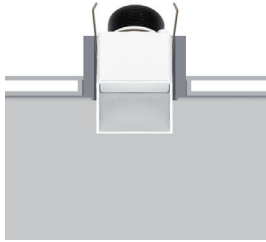

Revolutionary trimless, recessed fixtures, with diameters starting from just 30mm and an extremely clean and simple fixing system, offer innovative compositional possibilities and recessed optics for high viewing comfort. Available in multiple beam angles and ideal for applications ranging from the accenting of display elements and architectural details to general lighting.

Encastrables trimless révolutionnaires : avec des diamètres qui partent de 30 mm seulement et un système de fixation au coffrage extrêmement simple, ils offrent des possibilités de composition inédites, avec des optiques en retrait pour un confort visuel élevé. Équipés avec LED Fidelity il se caractérise par un CRI98 et R9 93. Disponible dans huit finitions, trois températures couleur et deux optiques extrêmement propres et performantes.

Empotrables trimless revolucionarios: con diámetros a partir de 30 mm y un sistema de fijación extremadamente sencillo al encofrado, ofrecen unas posibilidades de composición sin precedentes, con ópticas hacia atrás para un alto confort visual. Equipados con LED Fidelity, se caracteriza por un CRI98 y R9 93. Disponible en ocho acabados, tres temperaturas de color y dos ópticas extremadamente sutiles y de alto rendimiento.

IP20 Class 2  made in Canada

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 2,9V)

Power
Puissance
Potencia
1,5W


Series wiring
Câblage en série
Cableado en serie

LED selection
Sélection des LED
Selección del LED
3-Step MacAdam


CRI
90

Lumens
500mA
2700K — 128 lm
3000K — 133 lm
3500K — 146 lm
4000K — 154 lm

Dimensions
Dimensiones



Photometric diagrams
Diagrammes photométriques
Diagramas fotométricos

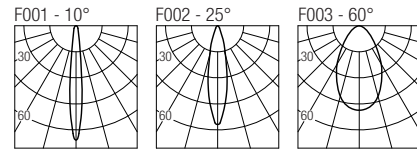

Code construction
Construction du code produit
Construcción del código de producto

ZS2 X X X


	27	30	35	40
	2700K	3000K	3500K	4000K
0	1	2		
10°	25°	60°		
1	5	C		
White	Black	Custom		

Accessories

Accessoires
Accesorios

AT064Q01040

Airtight recessed housing for insulated ceiling




IC064Q01040

Recessed housing for insulated ceiling


MP-Q040

Baseplate




Q01040

T-bar baseplate




ZQC002 White

Plasterboard recessing frame



LH01

Low luminance hex louvre 

500mA drivers

Alimentateurs 500mA
Alimentadores 500mA

CCPRO10A-500 (1..6) IP20

Dimming: PHASE - 0-10V

CCPRO40A-500 (1..18) IP20

Dimming: PHASE - 0-10V