

ZERO R2
Trimless downlight

design Roberto Mantovani



Revolutionary trimless, recessed fixtures, with diameters starting from just 30mm and an extremely clean and simple fixing system, offer innovative compositional possibilities and recessed optics for high viewing comfort. Available in multiple beam angles and ideal for applications ranging from the accenting of display elements and architectural details to general lighting.

Encastrables trimless révolutionnaires : avec des diamètres qui partent de 30 mm seulement et un système de fixation au coffrage extrêmement simple, ils offrent des possibilités de composition inédites, avec des optiques en retrait pour un confort visuel élevé. Équipés avec LED Fidelity il se caractérise par un CRI98 et R9 93. Disponible dans huit finitions, trois températures couleur et deux optiques extrêmement propres et performantes.

Empotrables trimless revolucionarios: con diámetros a partir de 30 mm y un sistema de fijación extremadamente sencillo al encofrado, ofrecen unas posibilidades de composición sin precedentes, con ópticas hacia atrás para un alto confort visual. Equipados con LED Fidelity, se caracteriza por un CRI98 y R9 93. Disponible en ocho acabados, tres temperaturas de color y dos ópticas extremadamente sutiles y de alto rendimiento.

IP20 Class 2  made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
500mA (V_i 2,9V)

Power

Puissance
Potencia
1,5W

Series wiring

Câblage en série
Cableado en serie

LED selection

Sélection des LED
Selección del LED
3-Step MacAdam

CRI


90

Lumens

500mA
2700K **128 lm**
3000K **133 lm**
3500K **146 lm**
4000K **154 lm**

Dimensions


Dimensiones



Photometric diagrams

Diagrammes photométriques

Diagramas fotométricos

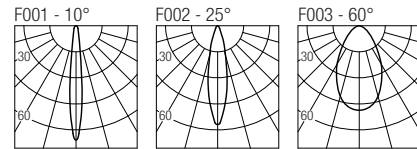


Code construction

Construction du code produit

Construcción del código de producto

ZS1 X X X

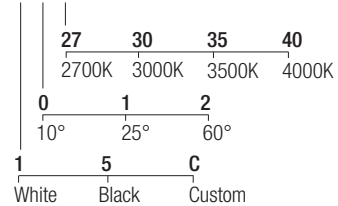


Accessories

Accessoires

Accesorios

AT064R01045

Airtight recessed housing for insulated ceiling



IC064R01045

Recessed housing for insulated ceiling


MP-R045

Baseplate



R01045

T-bar baseplate



ZQC001 White

Plasterboard recessing frame



ZQC001.BMK-WH White

ZQC001.BMK-BLK Black

ZQC001.BMK-CU Custom

Backmount frame for hard surfaces



LH01

Low luminance hex louvre 

500mA drivers

Alimentateurs 500mA

Alimentadores 500mA

CCPR010A-500 (1..6) IP20

Dimming: PHASE - 0-10V

CCPR040A-500 (1..18) IP20

Dimming: PHASE - 0-10V