


ZERO R6
Trimless downlight

design Roberto Mantovani

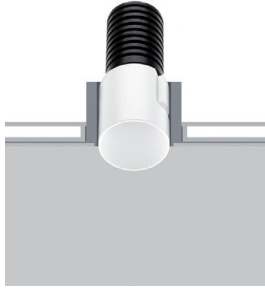

Revolutionary trimless recessed fixtures: with diameters starting from just 30mm and an extremely simple fixing system, offer innovative compositional possibilities and recessed optics for high visual comfort. Equipped with Fidelity LED it places emphasis on CRI98 and R9 93. Available in eight finishes, three colour temperatures and two extremely clean and performing optics.

Encastrables trimless révolutionnaires : avec des diamètres qui partent de 30 mm seulement et un système de fixation au coffrage extrêmement simple, ils offrent des possibilités de composition inédites, avec des optiques en retrait pour un confort visuel élevé. Équipés avec LED Fidelity il se caractérise par un CRI98 et R9 93. Disponible dans huit finitions, trois températures couleur et deux optiques extrêmement propres et performantes.

Empotrables trimless revolucionarios: con diámetros a partir de 30 mm y un sistema de fijación extremadamente sencillo al encofrado, ofrecen unas posibilidades de composición sin precedentes, con ópticas hacia atrás para un alto confort visual. Equipados con LED Fidelity, se caracteriza por un CRI98 y R9 93. Disponible en ocho acabados, tres temperaturas de color y dos ópticas extremadamente sutiles y de alto rendimiento.

IP20 Class 2  JA8 made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
Static White: 500mA (V_{9V})
Dim To Warm: 250mA (V_{18V})

Power

Pouissance
Potencia
Static White: 4,5W
Dim To Warm: 4,5W

Series wiring

Câblage en série
Cableado en serie

LED selection

Sélection des LED
Selección del LED
2-Step MacAdam


CRI
98

Lumens

2400K — 406 lm
2700K — 517 lm
3000K — 541 lm
3500K — 548 lm
4000K — 541 lm
DW — 358 lm

Dimensions


Dimensiones



Photometric diagrams

Diagrammes photométriques


Diagramas fotométricos



Code construction

Construction du code produit
Construcción del código de producto

ZW1 X X X

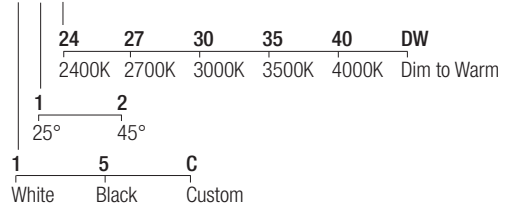


Accessories

Accessoires

Accesorios

AT064R01045

Airtight recessed housing for insulated ceiling



IC064R01045

Recessed housing for insulated ceiling


MP-R045

Baseplate



R01045

T-bar baseplate



ZQC001 White

Plasterboard recessing frame




ZQC001.BMK-WH White


ZQC001.BMK-BLK Black

ZQC001.BMK-CU Custom

Backmount frame for hard surfaces



LH01

Low luminance hex louvre 

Static White 500mA drivers

Static White Alimentateurs 500mA
Static White Alimentadores 500mA

CCPR010A-500 (1..2) IP20

Dimming: PHASE - 0-10V

CCPR040A-500 (1..6) IP20

Dimming: PHASE - 0-10V

Dim to Warm 250mA drivers

Dim to Warm Alimentateurs 250mA

Dim to Warm Alimentadores 250mA

CCPR010A-250-DW (1..2) IP20

Dimming: PHASE - 0-10V

CCPR040A-250-DW (1..3) IP20

Dimming: PHASE - 0-10V