


ZOE 10
Trimless downlight

design Rod&Todd



A small and shallow trimless downlight characterized by a minimal design and high optical performance. Equipped with CRI85 or CRI93 LEDs, it lends itself to applications ranging from accent to general illumination. Thanks to the use of highly-advanced optics, it offers narrow and precise light beams. Can be fitted with an anti-glare filter for maximum visual comfort.

Encastrable trimless à plafond petit et peu profond caractérisé par un design minimal et des performances optiques élevées. Équipé de LEDs avec CRI85 ou CRI93, il se prête à des applications allant de l'accentuation à l'éclairage général. Grâce à l'utilisation d'optiques avancées, il offre des faisceaux lumineux étroits et précis. Peut être équipé d'un filtre anti-éblouissement pour un confort visuel maximal.

Un downlight trimless pequeño y poco profundo que se caracteriza por un diseño minimalista y un alto rendimiento óptico. Equipado con LED CRI85 o CRI93, se presta a aplicaciones que van desde acento hasta iluminación general. Gracias al uso de ópticas muy avanzadas, ofrece haces de luz estrechos y precisos. Se puede equipar con un filtro antideslumbramiento para un máximo confort visual.

IP20 Class 2  JA8 made in Canada

Supply current
Courant d'alimentation
Corriente de alimentación
Static White: 500mA (V_i18V)
Dim To Warm: 400mA (V_i18V)
Tunable White: 500mA (V_i18V)

Power
Puissance
Potencia
Static White: 9W
Dim To Warm: 7,2W
Tunable White: 9W


Series wiring
Câblage en série
Cableado en serie

LED selection
Sélection des LED
Selección del LED
2-Step MacAdam


CRI
98

Lumens
2400K — 770 lm
2700K — 1125 lm
3000K — 1180 lm
3500K — 1195 lm
4000K — 1178 lm
DW — 667 lm
TW — 875 lm

Dimensions
Dimensiones




Photometric diagrams
Diagrammes photométriques
Diagramas fotométricos

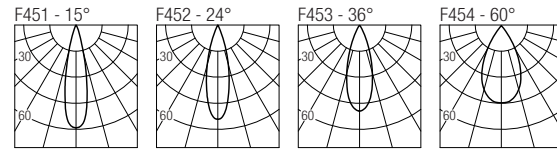

Code construction

Construction du code produit
Construcción del código de producto

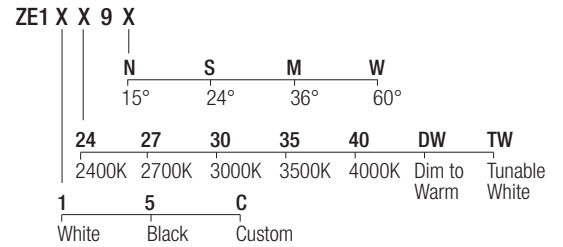


Accessories

Accessoires
Accesorios

AT064R01070

Airtight recessed housing for insulated ceiling



IC064R01070

Recessed housing for insulated ceiling


MP-R070

Baseplate



R01070

T-bar baseplate



ZQC003 White

Plasterboard recessing frame



ZQC003.BMK-WH White

ZQC003.BMK-BLK Black

ZQC003.BMK-CU Custom

Backmount frame for hard surfaces



LH04

Low luminance hex louvre 

Static White 500mA drivers

Static White Alimentateurs 500mA
Static White Alimentadores 500mA

CCPRO10A-500 (1) IP20

Dimming: PHASE - 0-10V

CCPRO40A-500 (1..3) IP20

Dimming: PHASE - 0-10V

Dim to Warm 400mA drivers

Dim to Warm Alimentateurs 400mA
Dim to Warm Alimentadores 400mA

CCPRO10A-400 (1) IP20

Dimming: PHASE - 0-10V

CCPRO40A-400 (1..3) IP20

Dimming: PHASE - 0-10V

Tunable White 500mA drivers

Tunable White Alimentateurs 500mA
Tunable White Alimentadores 500mA

DL0561S1 (1..3) IP20

Dimming: 0-10V