

ZOE 20
Trimless downlight

design Rod&Todd



A small and shallow trimless downlight with a minimalist design and high optical performance. Equipped with very high flux CR98 LEDs, it is suitable for applications ranging from accent to general lighting. Thanks to the use of advanced optics, it provides narrow and precise light beams. Can be fitted with an anti-glare filter for maximum visual comfort.

Un downlight sans garniture, petit et peu profond, au design minimaliste et aux performances optiques élevées. Équipé de LED CR98 à très haut flux, il convient aux applications allant de l'éclairage d'accentuation à l'éclairage général. Grâce à l'utilisation d'une optique avancée, il produit des faisceaux lumineux étroits et précis. Elle peut être équipée d'un filtre anti-éblouissement pour un confort visuel maximal.

Un downlight trimless pequeño y poco profundo con un diseño minimalista y un alto rendimiento óptico. Equipado con LED CR98 de flujo muy elevado, es adecuado para aplicaciones que van desde la iluminación de acento a la iluminación general. Gracias al uso de una óptica avanzada, proporciona haces de luz estrechos y precisos. Puede equiparse con un filtro antideslumbrante para un máximo confort visual.

IP20 Class 2  made in Canada

Supply current

Courant d'alimentation
Corriente de alimentación
500mA (V_{36V})

Power

Puissance
Potencia
18W

LED selection


Sélection des LED
Selección del LED
2-Step MacAdam

CRI
98


Lumens

2700K — 2165 lm
3000K — 2279 lm
3500K — 2498 lm
4000K — 2423 lm

Dimensions
Dimensiones

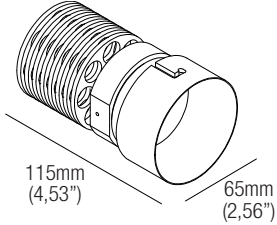

Photometric diagrams
Diagrammes photométriques
Diagramas fotométricos

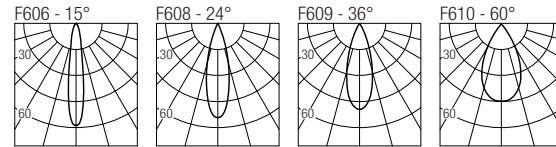

Code construction

Construction du code produit
Construcción del código de producto


ZE2 X X X				
	27	30	35	40
	2700K	3000K	3500K	4000K
N	S	M	W	
15°	24°	36°	60°	
1	5	C		
White	Black	Custom		

Accessories

Accessoires
Accesorios

AT086R02075

Airtight recessed housing for insulated ceiling



IC086R02075

Recessed housing for insulated ceiling


MP-R075

Baseplate



R02075

T-bar baseplate



ZQSU002 White

Plasterboard recessing frame



ZQSU002.BMK-WH White

ZQSU002.BMK-BLK Black

ZQSU002.BMK-CU Custom

Backmount frame for hard surfaces



LH06

Low luminance hex louvre 

500mA drivers

Alimentateurs 500mA
Alimentadores 500mA

CCPRO40A-500 (1) IP20

Dimming: PHASE - 0-10V