


BABA R2


design: Roberto Mantovani

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 2.9V)

Power
 Pouissance
 Potencia
1.5W



Photometric diagrams

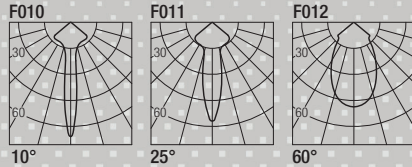


CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4000K	154 lm	93

Optionals

Accessoires
 Accesorios


CS1006

Recessing box
 Boîtier d'encastrement
 Caja de empotrar



MP-R030


Mounting Plate
 with 30mm Hole



T-Bar Installation

R01030

Mounting Plate
 with 30mm Hole

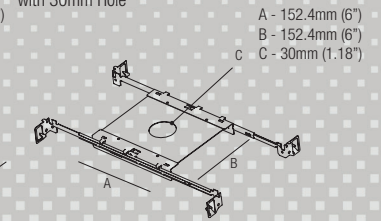


IC Housings

IC064R01030

Recessed Box for
 Insulated Ceiling
 with 30mm Hole

AT064R01030

Air Tight Recessed
 Box for Insulated
 Ceiling with
 30mm Hole





BABA Q2


design: Roberto Mantovani

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 2.9V)

Power
 Pouissance
 Potencia
1.5W

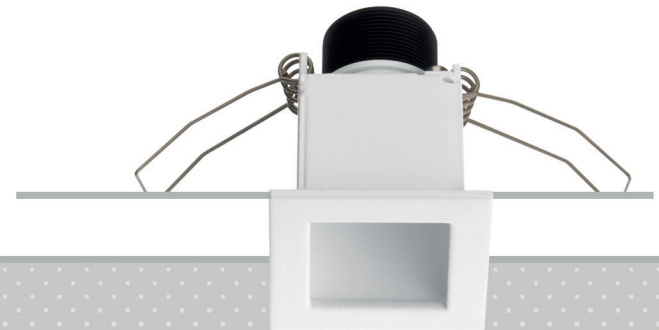


Photometric diagrams

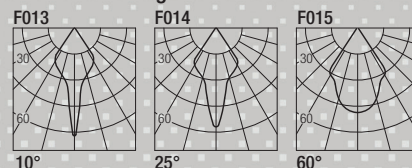

CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4000K	154 lm	93

MP-Q040


Mounting Plate
 with 40mm Hole



T-Bar Installation

Q01040

Mounting Plate
 with 40mm Hole

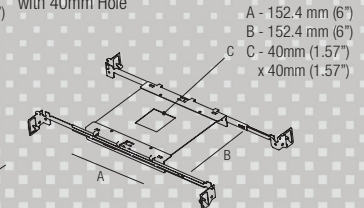


IC Housings

IC064Q01040

Recessed Box for
 Insulated Ceiling
 with 40mm Hole

AT064Q01040

Air Tight Recessed
 Box for Insulated
 Ceiling with
 40mm Hole





Code Construction

Construction du code produit
 Construcción del código de producto

BS|X|X|X|XX|


BS	X	Shape Forma Forme	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color
		1 Round Rond Redondo		1 White Blanc Blanco		0 10° 1 25° 2 60°		27 2700K 30 3000K 35 3500K 40 4000K CU Custom Personnalisée Personalizado
		2 Square Carré Cuadrado		5 Black Noir Negro				
				C Custom Personnalisée Personalizado				

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White	Phase / 0-10V (Dual Dimming)		
500mA	<table border="1"> <tr> <td>CCPR010-A Min. 1 Max. 6</td> <td>CCPR040-A Min. 1 Max. 18</td> </tr> </table>	CCPR010-A Min. 1 Max. 6	CCPR040-A Min. 1 Max. 18
CCPR010-A Min. 1 Max. 6	CCPR040-A Min. 1 Max. 18		