



BABA R6

design: Roberto Mantovani




Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_i 8.7V)

Power
 Pouissance
 Potencia
4.5W

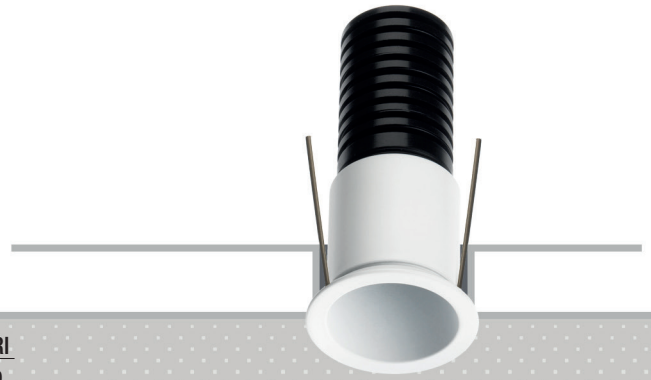

Photometric diagrams

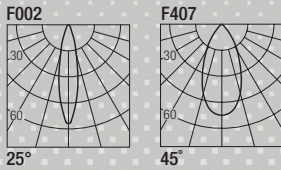

CCT	Flux	CRI	CCT	Flux	CRI
2400K	472 lm	95+	Dim to Warm 1800K-3000K	416 lm	90
2700K	421 lm	98+			
3000K	446 lm	98+			
3500K	464 lm	98+			
4000K	482 lm	98+			

Code Construction

Construction du code produit
 Construcción del código de producto

BW1 | X | X | XX | E


BW1	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo de haz	XX	Color Temp. Température couleur Temperatura de color	E
	1	White Blanc Blanco	1	25°	24	2400K	
	5	Black Noir Negro	2	45°	27	2700K	
	C	Custom Personnalisée Personalizado			30	3000K	
					35	3500K	
					40	4000K	
					DW	Dim Warm	
					CU	Custom Personnalisée Personalizado	

Drivers (Remote)



Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

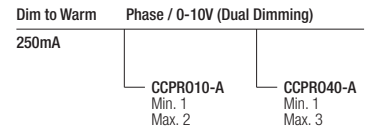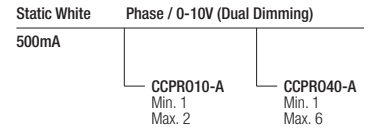


L001

Low luminance louvre
 Filtre basse luminance
 Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-R030
 Mounting Plate
 with 30mm Hole

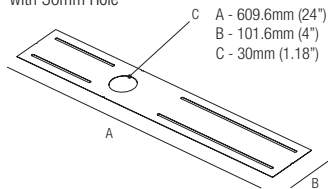


RO1030
 Mounting Plate
 with 30mm Hole

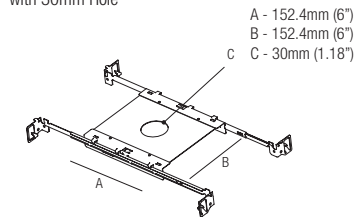

IC Housings

IC064R01030
 Recessed Box for
 Insulated Ceiling
 with 30mm Hole


AT064R01030
 Air Tight Recessed
 Box for Insulated
 Ceiling with
 30mm Hole

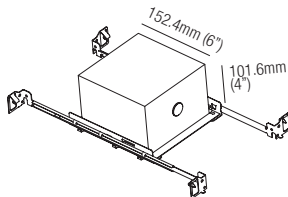

Optionals - Accessoires - Accesorios

CS1006

Recessing box
 Boîtier d'encastrement
 Caja de empotrar



DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W

